

Shark Cleaning Equipment

2015 CATALOG

Floor Care
Pressure Washers
Drain Cleaning Jetters
In-Shop Cleaning Products
Parts Washers

PHONE: 800.771.1881
EMAIL: Sales@SharkPW.com

Shark offers over 100 commercial-grade, hot & cold water pressure washers, trailers and jetters that are built to last, yet affordably priced

Shark's reputation for ruggedness and safety is the result of more than 80 years of combined expertise fostered within the largest manufacturer of industrial pressure washers in North America.

The engineering and craftsmanship of the Shark pressure washer line are renowned thanks to the equipment's simple design, durability from oversized components and many safety features. Among the most recent improvements is advanced U-Seal technology in all high-pressure Shark pumps (photo above).

Over 100 models of Shark pressure washers are backed by the strongest warranty in the cleaning equipment industry, including a 7-year limited warranty on the Shark crankcase pump. Most models meet CETA performance-certified standards. Also most models are certified by Intertek Testing Services (ETL) to the rigid UL-1776 and CSA safety standards for high-pressure cleaning equipment.

Plus, all Shark production plants are ISO 9001 and 14001 certified.

COLD WATER | 60 MODELS | GAS OR ELECTRIC POWERED | PORTABLE OR STATIONARY

6 Reasons: Why Shark cold water pressure washers are top value

1. Durable, triplex, oil-bath, **high-pressure Shark pump**, with three ceramic pistons and forged brass manifold, backed by a 7-year limited warranty*
2. Rugged **chassis** is made of 10-gauge steel and painted with black wrinkle paint for all-weather resistance; chrome handles are now standard
3. Belt-drive units have notched **V-belts** and cast-iron **pulleys** to reduce belt slippage and extend pump life; plus easy-to-adjust belt tension with a single bolt
4. Reliable Honda **engine** on most models with a three-year limited warranty plus low-oil alert and silent-tone muffler
5. Safety thermal **pump saver** valve protects against hot-water damage by venting recirculated water
6. Pumps featuring our **U-Seal Technology** provide longer life than competitors' pumps for lower cost-of-ownership

**7-year limited warranty on crankcase pumps only.*

HOT WATER | OVER 60 MODELS | GAS OR ELECTRIC POWERED | PORTABLE OR STATIONARY

6 Reasons: Why Shark hot water models are #1 in North America

1. Durable **hot water coil** made of 1/2-inch, Schedule 80 steel pipe and cold rolled for years of leak-free operation; with easy coil access design
2. Totally enclosed **control panel** with automatic thermostat, hour meter and burner on/off switch
3. Rugged, triplex, oil-bath, **high-pressure Shark pump**, with three ceramic pistons and forged brass manifold, backed by a 7-year limited warranty
4. Four **vibration isolators** mounted under the engine reduce vibration and wear and tear on components
5. All-steel **chassis** and frame with lifting point; painted with black wrinkle paint for all-weather protection
6. **Shark ClearFlame** burner exclusively designed for pressure washers

NOTE: There are many parts and accessories we sell which are not included in the catalog. Should you need an item or part not included in the catalog, call Shark at 800-771-1881. Our parts warehouse has more than 40,000 different replacement parts and accessories in stock or ready to order when you need them most. www.SharkPW.com

Features Key:

- *Intertek Listed*
- *Cleaning Eqt. Trade Assoc. Performance Certified*
- *Warranty Terms*
- *National Assoc. of Trailer Manufacturers Approved*
- *Powered by Honda*
- *Includes U-Seal Technology*
- *Includes quality Shark Pump*

TABLE OF CONTENTS

Pressure Washers- Shark

- Cold Water 4-9
- Hot Water 10-16
- Trailers 17-20
- Specials 21-23
- Jetters 24-25
- Drain Augers 26
- Accessories 27-41
- Nozzle Chart 37
- Accessories Rack 38-39
- Detergents/ Gum Removal 40-41
- Disaster Restoration 42

Floor Care- Windsor Karcher Group

- Chariots 43-44
- Extractors 45
- Vacuums 46
- Wet/Dry Vacs 47
- Chemicals 48
- Sweepers / Scrubbers 49
- Floor Machines / Burnishers 50-51
- Industrial 52-53

Water Treatment

- Water Treatment 54
- Wash Pads 55

PHONE: 800.771.1881
EMAIL: Sales@SharkPW.com

COLD WATER | GASOLINE POWERED | DIRECT-DRIVE PUMP

RG SERIES: Residential-grade models offer economical alternative

Features

- Durable steel frame
- Portable, easy to transport
- Integrated chemical injection
- Certified to UL and CSA pressure washer safety standard

Model	Order No.	GPM+	PSI+	Engine	CC	Pump	Ship Wt
RG-232637*	1.107-235.0	2.3	2600	Honda GCV160	160	Axial	78 lbs
RG-253037	1.107-236.0	2.5	3000	Honda GC190	187	Axial	77 lbs
RG-364037	1.107-237.0	3.6	4000	Honda GX390	389	Axial	144 lbs

* Vertical shaft pump
+ Performance certified to PWMA standard +/- 20% of advertised specifications

Dimensions: RG-232637: 21"L x 23"W x 31"H;
RG-253037: 22"L x 23"W x 35"H;
RG-364037: 37"L x 24"W x 31"H

KG SERIES: Professional performance with German-engineered technology

Features

- Honda engines
- Commercial-duty axial pump with 5-year limited warranty
- Reinforced upright steel frame
- Unmatched value
- Certified to UL and CSA pressure washer safety standard

Model	Order No.	GPM	PSI	Engine	CC	Pump	Ship Wt
KG-252437	1.107-238.0	2.5	2400	Honda GC160	160	Axial	115 lbs
KG-262637	1.107-239.0	2.6	2600	Honda GC190	187	Axial	115 lbs
KG-313137*	1.107-240.0	3.0	3000	Honda GX270	270	Axial	175 lbs
KG-403637*	1.107-241.0	4.0	3600	Honda GX390	389	Axial	181 lbs

* KG-313137 & KG-403637 come standard with a 100 ft. hose reel, 50' hose included

Dimensions: 22"L x 23"W x 35"H (42"H with hose reel)

Hammerhead (DD) SERIES: Commercial-grade, value-priced, high quality

DD-383537

DD-232336 & DD-232337

DD-252737

DD-354037

Features

- Steel frame with powder coat finish
- Honda GC and GX engines
- Industrial direct-drive crankcase pump on DD-252737, DD-383537 & DD-354037
- Downstream detergent injection
- Certified to UL and CSA pressure washer safety standard

Model	Order No.	GPM	PSI	Engine	CC	Pump	Ship Wt
DD-232337	1.107-135.0	2.3	2300	Honda GC160	160	Axial	72 lbs
DD-232336	1.107-134.0	2.3	2300	Honda GC160	160	Comet BXD	73 lbs
DD-252737	1.107-136.0	2.5	2700	Honda GX200	196	SG Crankcase	99 lbs
DD-383537	1.107-137.0	3.8	3500	Honda GX390	389	SS Crankcase	132 lbs
DD-354037	1.107-221.0	3.5	4000	Honda GX390	389	SS Crankcase	166 lbs

Dimensions: DD-232337, DD-232336, & DD-252737: 23"L x 22"W x 25"H; DD-383537 & DD-354037: 36.5"L x 23.5"W x 30.5"H

5-year limited warranty on Comet BXD and Axial pumps

7-year limited warranty applies to crankcase pumps only

PALLET PRICING

ORDER NO.	DESCRIPTION
8.919-843.0	Pallet of 8 DD-232337
8.919-844.0	Pallet of 8 DD-232336
8.919-845.0	Pallet of 8 DD-252737
8.919-850.0	Pallet of 2 DD-383537
8.921-613.0	Pallet of 2 DD-354037

MIXED PALLET COMBINATIONS

ORDER NO.	DESCRIPTION
8.919-846.0	QTY 5 DD-232337 and QTY 3 DD-252737
8.919-847.0	QTY 5 DD-232336 and QTY 3 DD-252737

CD SERIES: Lightweight, hand-held models

Features

- Durable steel frame
- Axial or crankcase pump
- Easy to transport
- Certified to UL and CSA pressure washer safety standard

Model	Order No.	GPM	PSI	Engine	CC	Pump	Ship Wt
CD-232336	1.107-153.0	2.3	2300	Honda GC160	160	Axial**	70 lbs
CD-232437	1.107-152.0	2.3	2400	Honda GX160	196	SG Crankcase*	80 lbs

Dimensions: 16"L x 24"W x 22"H
* SG Pump comes with 7-year limited warranty
**Axial pump comes with a 5-year limited warranty

DG SERIES: Compact industrial-grade- our most popular direct-drive cold water unit

DG: Gasoline-powered, direct-drive

DG-354037

Features

- Chrome handles
- Steel frame with powder coat finish
- Honda GX engine
- Shark industrial direct-drive crankcase pump w/ U-Seal technology
- Certified to UL and CSA pressure washer safety standard

Model	Order No.	GPM	PSI	Engine	CC	Pump	Ship Wt
DG-232437	1.107-138.0	2.3	2400	Honda GX160	163	SG Crankcase	148 lbs
DG-252737	1.107-139.0	2.5	2700	Honda GX200	196	SG Crankcase	155 lbs
DG-303037	1.107-140.0	3.0	3000	Honda GX270	270	SG Crankcase	175 lbs
DG-383537	1.107-141.0	3.8	3500	Honda GX390	389	SS Crankcase	180 lbs
DG-354037	1.107-225.0	3.5	4000	Honda GX390	389	SS Crankcase	179 lbs

Dimensions: 35"L x 21"W x 24"H

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-026.0	E-Z Hose Reel Kit, 100 ft.

Aluminum (DGA) SERIES: Easy to maneuver, direct-drive, aluminum construction

Features

- Weldless aluminum frame of 1/4" tubing for maximum durability
- Honda GX engine
- Fold-down handle for easy storage
- Durable, corrosion-free finish
- Pump support bracket prolongs engine life
- Shark Industrial direct-drive crankcase pump w/ U-Seal technology

Model	Order No.	GPM	PSI	Engine	CC	Pump	Ship Wt
DGA-252737	1.106-054.0	2.5	2700	Honda GX200	196	SG Crankcase	125 lbs
DGA-303037	1.106-055.0	3.0	3000	Honda GX270	270	SG Crankcase	148 lbs
DGA-383537	1.106-056.0	3.8	3500	Honda GX390	389	SS Crankcase	172 lbs
DGA-354037	1.107-229.0	3.5	4000	Honda GX390	389	SS Crankcase	167 lbs

Dimensions: DGA: 41"L x 23"W x 40"H

PHONE: 800.771.1881
EMAIL: Sales@SharkPW.com

COLD WATER | GASOLINE & DIESEL POWERED | BELT-DRIVE PUMP

BG SERIES: Rugged, belt-drive cold water built to work hard and last long

Shown with optional hose reel

Features

- Chrome handles
- Powder coated steel chassis
- Honda GX engine
- High water volume
- Shark Industrial belt-drive crankcase pump w/ U-Seal technology
- ETL Safety Certified

Model	Order No.	GPM	PSI	Engine	CC	Pump	Ship Wt
BG-282037*	1.107-142.0	2.8	2000	Honda GX160	163	SD Crankcase	155 lbs
BG-252737*	1.107-143.0	2.5	2700	Honda GX200	196	SD Crankcase	163 lbs
BG-303037	1.107-144.0	3.0	3000	Honda GX270	270	SD Crankcase	225 lbs
BG-373537	1.107-145.0	3.7	3500	Honda GX390	389	SM Crankcase	250 lbs
BG-304037	1.107-146.0	3.0	4000	Honda GX390	389	SM Crankcase	250 lbs

Dimensions: *BG-282037, BG-252737: 37"L x 21"W x 24"H; **OTHERS:** 45"L x 26"W x 24"H
*Compact frame

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-025.0	E-Z Hose Reel Kit, 100 ft.

Note: Hose not included with hose reel kit

Aluminum (BGA) SERIES: Easy to maneuver, belt-drive, aluminum construction

Features

- Weldless aluminum frame of 1/4" tubing for maximum durability
- Honda GX engine
- Fold-down handle for easy storage
- Pump support bracket prolongs engine life
- Shark Industrial belt-drive crankcase pump w/ U-Seal technology
- Certified to UL and CSA pressure washer safety standard

Model	Order No.	GPM	PSI	Engine	CC	Pump	Ship Wt
BGA-252737	1.106-057.0	2.5	2700	Honda GX200	196	SD Crankcase	196 lbs
BGA-373537	1.106-058.0	3.7	3500	Honda GX390	389	SM Crankcase	249 lbs

Dimensions: BGA: 41"L x 23"W x 40"H

BR SERIES: Extra-rugged belt-drive cold water with cleaning power of up to 5000 PSI

Features

- Rugged steel chassis & roll cage
- Electric start on dual-axle models
- Certified to UL and CSA pressure washer safety standard
- Shark Industrial crankcase pump w/ U-Seal technology

Model	Order No.	GPM	PSI	Engine	CC	Fuel	Pump	Axles	Ship Wt
BR-373537	1.107-150.0	3.7	3500	Honda GX390	389	Gas	SM Crankcase	1	350 lbs
BR-404027	1.107-151.0	4.0	4000	Vanguard 16	479	Gas	SM Crankcase	2	470 lbs
BR-405037E	1.107-147.0	4.0	5000	Honda GX630	688E*	Gas	SX Crankcase	2	495 lbs
BR-455037E	1.107-148.0	4.5	5000	Honda GX660	688E*	Gas	SX Crankcase	2	500 lbs
BR-343087E	1.107-149.0	3.4	3000	Kohler KD420	442E*	Diesel	SM Crankcase	2	410 lbs

Dimensions: Single Axle: 42"L x 26"W x 30"H; **Double Axle:** 42"L x 26"W x 36"H
*E = Electric Start; Battery not included

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-028.0	E-Z Hose Reel Kit, 100 ft., single axle

Note: Hose not included with hose reel kit

PART NO.	DESCRIPTION
9.801-029.0	Hose Reel Kit, 100 ft., 5000 psi, double axle

GMS Gator Buddy: Cold Water, Gas Powered, Direct-Drive Skid

The Gator Buddy is the perfect solution when cleaning in remote areas. Its compact, self-contained design fits well inside the bed of most pickup trucks as well as many popular utility all-terrain ATVs on the market today. The unit comes standard with Shark's trusted direct-driven pump with 7-year warranty, as well as optional features such as rubber pad feet to absorb vibration.

Features

- Subaru 169 CC engine
- Direct Drive high-pressure pump
- 65-gallon water tank
- Ships with hose reel
- All steel frame
- Convenient forklift openings
- Recoil start
- Easy serviceability

Model	Order No.	GPM	PSI	CC	Engine	Pump	Ship Wt
GMS-252717	1.107-230.0	2.5	2700	169	Subaru EX17	SG Crankcase	488 lbs.

Dimensions: 40"L x 48"W x 35 "H

*Includes 65-gallon tank

OPTIONS

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
8.923-105.0	Rubber Foot Kit	8.923-107.0	Inline Filter Kit
8.923-106.0	Lifting Eye Kit	8.923-108.0	3 Way Valve Kit

DE SERIES: Electric-powered units have zero emissions– ideal for indoor cleaning

Features

- Chrome handles
- Steel frame and chassis protected by powder coat finish
- Heavy-duty industrial Baldor motor
- Direct-drive Shark crankcase pump
- Certified to UL and CSA pressure washer safety standard

Model	Order No.	GPM	PSI	Motor HP	Electrical	Amps	Pump	Ship Wt
DE-201007D	1.106-061.0	2.0	1000	1.5	120V / 1ph	15	SE Crankcase	140 lbs
DE-201507D	1.106-062.0	1.9	1300	2	120V / 1ph	20	SE Crankcase	150 lbs
DE-301007D	1.106-063.0	2.8	1000	2	120V / 1ph	20	SE Crankcase	150 lbs
DE-352007A	1.106-064.0	3.5	2000	5	230V / 1ph	22	SE Crankcase	167 lbs

Dimensions: 35"L x 21"W x 24"H

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-027.0	E-Z Hose Reel Kit, 100 ft.

Note: Hose not included with hose reel kit

HE SERIES: Lightweight, hand-held models

Features

- Durable steel frame
- Comet axial pump
- Easy to transport
- Certified to UL and CSA pressure washer safety standard

Model	Order No.	GPM	PSI	Motor HP	Electrical	Amps	Pump	Ship Wt
HE-201006D	1.106-065.0	2.0	1000	1.5	120V / 1ph	15	Comet Axial	80 lbs
HE-201406D	1.106-066.0	1.8	1400	2	120V / 1ph	20	Comet Axial	95 lbs

Dimensions: 16"L x 24"W x 22"H

*Comet AXD pump comes with a 1-year limited warranty

HD SERIES: European-style models offer ergonomic design and total trigger shutoff

HD-2.3/14 C Ed

HD-2.3/15 C Ed

Features

- Compact, ergonomic design
- Low-pressure soap injection system
- Auto start/stop
- Triple changeover nozzle
- Certified to UL and CSA pressure washer safety standard
- Industrial-grade pump

Model	Order No.	GPM	PSI	Motor HP	Electrical	Amps	Pump	Ship Wt
HD-1.8/13 C Ed	1.514-136.0	1.8	1300	2.7	120V / 1ph	15	Axial	65 lbs
HD-2.3/15 C Ed	1.150-626.0	1.1 - 2.3	300-1500	3.2	120V / 1ph	20	Axial	75 lbs
HD-3.0/20 C Ea	1.150-625.0	1.1 - 3	300-2000	5.2	230V / 1ph	20	Axial	68 lbs
HD-2.3/14 C Ed*	1.150-629.0	1.1 - 2.3	300-1400	3.2	120V / 1ph	20	Axial	75 lbs

Dimensions: 15"L x 14"W x 37"H
***Designed for food service or kitchen applications because it accepts hot water of up to 180°F**
(Previously sold as KE Series)

HE+: Wall mount unit, great for wash bays

Features

- Durable steel frame
- Shark Industrial crankcase pump w/ U-Seal technology
- Auto start/stop
- Remote on/off switch
- Certified to UL and CSA pressure washer safety standard

Model	Order No.	GPM	PSI	Motor HP	Electrical	Amps	Pump	Ship Wt
HE-201407D+	1.106-067.0	1.8	1400	2	120V / 1ph	20	SE Crankcase	120 lbs

Dimensions: 16"L x 24"W x 22"H

HE+: Electric-powered with optional wall mount bracket: 8.920-952.0

OPTIONS

PART NO.	DESCRIPTION
8.920-952.0	Wall mount bracket

Wall mount units are perfect for wash bay applications, such as:

- Outdoor Power & Equipment
- Garages
- Repair Shops

BRE SERIES: Electric-driven 5 GPM at 5000 PSI cold-water blasters - Belt-Drive

Features

- Rugged steel chassis & roll cage
- Belt-drive Shark crankcase pump
- 20 HP Baldor motor
- 13" tubed pneumatic tires
- Certified to UL and CSA pressure washer safety stand

Model	Order No.	GPM	PSI	Motor HP	Electrical	Amps	Pump	Ship Wt
BRE-505007B	1.106-060.0	5	5000	20	230V / 3ph	48	SX Crankcase	480 lbs
BRE-505007C	1.106-059.0	5	5000	20	460V / 3ph	26	SX Crankcase	480 lbs

Dimensions: 42"L x 26"W x 30"H

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-029.0	Hose Reel Kit, 100 ft., 5000 psi

Note: Hose not included with hose reel kit

CB SERIES: Electric-powered cabinet unit ideal for indoor wash bays

CB: Electric-powered, belt-drive

Wheel Kit with detergent rack and optional hose reel

Stainless steel unit shown on floor stand with caster wheels

Features

- Accepts hot water up to 180°F
- Powder coated steel cabinets
- Downstream injector
- Certified to UL and CSA pressure washer safety standard
- Shark belt-drive pump w/ 7-yr limited warranty

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Pump	Ship Wt
CB-301007D	1.106-551.0	2.8	1000	2	120V / 1ph	20	SD Crankcase	210 lbs
CB-402007A	1.106-552.0	4.2	2000	6	230V / 1ph	29	SM Crankcase	285 lbs
CB-402007B	1.106-553.0	4.2	2000	6	230V / 3ph	19	SM Crankcase	255 lbs
CB-402007C	1.106-554.0	4.2	2000	6	460V / 3ph	11	SM Crankcase	260 lbs
CB-402007H	1.106-555.0	4.2	2000	6	208V / 3ph	16	SM Crankcase	265 lbs
CB-353007A	1.106-556.0	3.5	3000	7.5	230V / 1ph	36	SM Crankcase	330 lbs
CB-353007B	1.106-557.0	3.5	3000	7.5	230V / 3ph	19	SM Crankcase	275 lbs
CB-353007C	1.106-558.0	3.5	3000	7.5	460V / 3ph	11	SM Crankcase	270 lbs
CB-353007G	1.106-559.0	3.5	3000	7.5	208V / 1ph	38	SM Crankcase	332 lbs
CB-353007H	1.106-560.0	3.5	3000	7.5	208V / 3ph	23	SM Crankcase	271 lbs
CB-353007F	TBA	3.5	3000	7.5	575V / 3ph	23	SM Crankcase	271 lbs

Dimensions: 26"L x 20"W x 16"H

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-002.0*	Conversion to Stainless Steel Cabinet & Cover
9.801-011.0*	Auto Start Stop
9.801-012.0*	Time-Delay Shutdown
9.801-013.0*	Hour Meter
9.801-031.0	Wheel Kit with Detergent Rack
9.801-033.0	Wall Mount Kit
8.903-043.0	Stainless Steel Wall Mount Kit
8.941-546.0	Stainless Steel Floor Stand, No Bracket

* Factory installed only
**Hose not included

PART NO.	DESCRIPTION
8.903-040.0	Floor Stand, 24" Tall
9.801-034.0	Floor Stand, 36" Tall
8.903-617.0	Stainless Steel Floor Stand, 36" Tall
9.801-035.0	Caster Wheels for Floor Stand
9.801-036.0	Hose Reel Kit, Floor Stand Only, 100 ft.**
8.903-521.0	Hose Reel, For Wheel Kit, 100 ft.**
9.802-265.0	Hose Reel Kit (Cox), Wall Mount, 100 ft.**
8.903-039.0	Hose Reel Kit w/ Bracket for Stand, Wall Mount Kits, 100 ft.**

PHONE: 800.771.1881
EMAIL: Sales@SharkPW.com

SGP SERIES: Portable, self-contained hot water pressure washer—our #1 seller

SGP-302517:
Compact design, Gas-powered, diesel/oil-heated

SGP Full-Size Cage Design:
Gas-powered, diesel/oil-heated

Features

- Shark Direct-drive crankcase pump
- Stainless steel coil wrap standard
- Rugged frame with powder coat finish
- Tubed pneumatic tires
- 1/2" Schedule 80 heating coil
- New high-efficiency **Shark ClearFlame** burner
- Hour meter comes standard
- Certified to UL and CSA pressure washer safety standard
- Tamper-proof RPM control

Model	Order No.	GPM	PSI	Engine	CC	Start	Pump	Burner	BTUs	Ship Wt
SGP-302517	1.110-059.0	2.7	2400	Subaru EX21	211	Recoil	SG Crankcase	12V DC	252,000	400 lbs
SGP-303037	1.110-054.0	2.6	3000	Honda GX270	270	Recoil	SG Crankcase	12V DC	243,000	500 lbs
SGP-353037	1.110-055.0	3.5	3000	Honda GX340	389	Recoil	SS Crankcase	12V DC	326,000	550 lbs
SGP-353037E	1.110-056.0	3.5	3000	Honda GX340	389E*	Electric	SS Crankcase	12V DC	326,000	560 lbs
SGP-403537E	1.110-057.0	3.5	3500	Honda GX390	389E*	Electric	SS Crankcase	12V DC	326,000	595 lbs

Dimensions: Full-size 46"L x 28"W x 44"H • Compact 39"L x 28"W x 42"H

*E = Electric start engine; Battery included on SGP-403537E only

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-024.0	E-Z Hose Reel Kit, 100 ft.
9.804-570.0	Hose Reel Kit, Pivot, 100 ft.

Note: Hose not included with hose reel kit

SSG SERIES: Our most rugged hot model designed for continuous, on-site performance

Shown with optional wheel kit
(Only available on SSG Series)

Features

- New high-efficiency **Shark ClearFlame** burner
- Shark Belt-drive tri-plunger crankcase U-seal pump
- 1/2" Schedule 80 heating coil
- Stainless steel coil wrap
- Power generator on four models
- High-pressure upstream soap injector
- Steam combination comes standard
- Certified to UL and CSA pressure washer safety standard

Model	Order No.	GPM	PSI	Engine	CC	Fuel	Pump	Burner	BTUs	Ship Wt
SSG-403037E	1.110-579.0	3.9	3000	Honda GX390	389E*	Gas	ST Crankcase	12V DC	364,000	805 lbs
SSG-503027E	1.110-580.0	4.8	3000	Vanguard 16	479E*	Gas	ST Crankcase	12V DC	448,000	854 lbs
SSG-503027E/G	1.110-581.0	4.8	3000	Vanguard 16	479E*	Gas	ST Crankcase	120V AC	448,000	945 lbs
SSG-503537E	1.110-582.0	4.7	3500	Honda GX630	688E*	Gas	ST Crankcase	12V DC	439,000	855 lb
SSG-503537E/G	1.110-583.0	4.7	3500	Honda GX630	688E*	Gas	ST Crankcase	120V AC	439,000	905 lbs
SSG-603537E	1.110-584.0	5.6	3500	Honda GX660	688E*	Gas	ST Crankcase	12V DC	523,000	852 lbs
SSG-603537E/G	1.110-585.0	5.6	3500	Honda GX660	688E*	Gas	ST Crankcase	120V AC	523,000	970 lbs
SSD-603567E	1.110-586.0	5.6	3500	Kohler KDW1003	1028E*	Diesel	ST Crankcase	12V DC	523,000	1200 lbs
SSD-603567E/G	1.110-587.0	5.6	3500	Kohler KDW1003	1028E*	Diesel	ST Crankcase	120V AC	523,000	1315 lbs

Machine Dimensions: Gas-powered 41"L x 41"W x 41"H; Diesel-powered 44"L x 51"W x 41"H

* E = Electric start engine; battery not included

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-003.0	Wheel Kit Assembly*
8.903-430.0	Stackless Flue Adapter
8.904-051.0	Battery Installed (688cc models only)**

*Gas-engine models only
**Factory Installed

STP SERIES: Electric-powered hot water pressure washer is compact and portable

Features

- Direct-drive Shark crankcase pumps
- Stainless steel coil wrap standard
- Oil-water separation fuel filter and hour meter
- 1/2" Schedule 80 heating coil
- 1725 RPM motors on 1.5-2 HP models
- Certified to UL and CSA pressure washer safety standard
- New high-efficiency **Shark ClearFlame** burner

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Pump	BTUs	Ship Wt
STP-231007D	1.109-101.0	2.1	1000	1.5	120V / 1 ph	15	SE Crankcase	196,000	480 lbs
STP-201507D	1.109-102.0	1.9	1500	2	120V / 1 ph	20	SE Crankcase	177,000	480 lbs
STP-352007A	1.109-103.0	3.5	2000	5	230V / 1 ph	22	SE Crankcase	326,000	500 lbs

Dimensions: 39"L x 27"W x 44"H

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-024.0	E-Z Hose Reel Kit, 100 ft.
9.804-570.0	Hose Reel Kit, Pivot, 100 ft.

Note: Hose not included with hose reel kit

HPB SERIES: Handtruck-style hot water series offers ruggedness and affordability

Features

- Available in 230V, 460V or 575V
- Belt-drive crankcase pump with U-Seal technology
- 1/2" Schedule 80 heating coil
- Stainless steel coil wrap standard
- **Shark ClearFlame** burner
- Fuel filter / water separator comes standard
- Front caster wheels for easy maneuvering
- Certified to UL and CSA pressure washer safety standard

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Drive	Pump	BTUs	Ship Wt
HPB-392007A	1.109-109.0	3.9	2000	6	230V / 1 ph	29	Belt	SM Crankcase	364,000	660 lbs
HPB-353007A	1.109-110.0	3.5	3000	7.5	230V / 1 ph	36	Belt	SM Crankcase	327,000	690 lbs
HPB-353007B	1.109-111.0	3.5	3000	7.5	230V / 3 ph	25	Belt	SM Crankcase	327,000	605 lbs
HPB-353007C	1.109-112.0	3.5	3000	7.5	460V / 3 ph	13	Belt	SM Crankcase	327,000	605 lbs
HPB-353007F	TBA	3.5	3000	7.5	575V / 3 ph	13	Belt	SM Crankcase	327,000	605 lbs

Dimensions: 41"L x 32"W x 44"H

OPTIONS [Factory Installed]

9.801-007.0	Hour Meter
9.801-008.0	Float Tank *(6 - 7.5 HP units, with soap valve)*
9.801-006.0	Auto Start/Stop *(6 - 7.5 HP models)**
9.804-512.0	Auto Start/Stop & Steam Combo *(6 - 7.5 HP)**
9.804-513.0	Auto Start/Stop & Float Tank *(6 - 7.5 HP)**
9.804-514.0	Auto Start/Stop, Steam & Float Tank *(6 - 7.5 HP)**
9.804-515.0	Steam Combination *(6-7 HP, if w/ float tank)*
9.801-009.0	Steam Combination *(6-7 HP, if no float tank)*
9.801-001.0	Time Delay Shutdown *(6 - 7.5 HP models)**
9.801-023.0	E-Z Hose Reel Kit, 100 ft.; no hose**

* Time Delay Shutdown and Auto Start/Stop are mutually exclusive
** Field installed only

SSE SERIES: Rugged electric-powered skid offers affordable alternative to gasoline

Features

- Rugged steel frame with shock-mounted sub-frame to reduce vibration
- 1/2" Schedule 80 heating coil
- Shark Industrial crankcase pump w/ U-Seal
- Nema 4x electrical box
- Certified to UL and CSA pressure washer safety standard
- **Shark ClearFlame** burner

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Drive	Pump	BTUs	Ship Wt
SSE-503007A	1.575-620.0	4.8	3000	10	230V / 1 ph	45	Belt	ST Crankcase	446,000	900 lbs
SSE-503007B	1.575-621.0	4.8	3000	10	230V / 3 ph	30	Belt	ST Crankcase	446,000	830 lbs
SSE-503007C	1.575-622.0	4.8	3000	10	460V / 3 ph	16	Belt	ST Crankcase	446,000	820 lbs
SSE-503007F	TBA	4.8	3000	10	575V / 3 ph	16	Belt	ST Crankcase	446,000	820 lbs

OPTIONS [Field Installed]

PART NO.	DESCRIPTION	
9.801-003.0	Wheel Kit Assembly	$487.00
8.903-430.0	Stackless Flue Adapter	$168.00

Dimensions: 41"L x 41"W x 41"H

SNG/SLP SERIES: Best pressure washers for maintenance shops and wash bays

Large Model
6-10 GPM

Standard Model
3.5-5 GPM

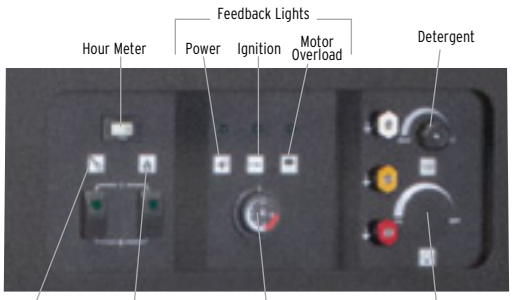

Removable Panels allow easy access from all sides

Easy, Versatile Installation:

- Utility hook ups can be configured for both sides of the machine
- Totally enclosed cabinet to protect vital components
- Many Voltage options
- Steam option
- "Fielder's Choice" inlet / outlet (hook up gas and water on either side of machine) provides flexibility with installation
- Ambient temp rise of 140° (can be higher with draft dampener)

Easy To Use and Operate:

- Simple 24-volt controls
- Feedback lights allow user to quickly troubleshoot potential problems
- Overload protected control switches are conveniently located for ease of operation
- Hour meter and variable temperature control
- Infinite detergent metering
- Safety trigger gun control
- Electronic ignition comes standard, eliminating the hassle of lighting the pilot light
- Fully enclosed cabinet with "Cool Wall" construction keeps cabinet cool to the touch

Easy To Service:

- 6 removable panels allow easy access to components for service and repair
- "Slide Out" motor platform and "Swing Out" burner ring are easy to inspect and repair
- "Stay In Place" pilot assembly is not attached to burner ring, making it easier to inspect and repair

Safety Certified:

- ETL certified to strict UL-1776 and CSA pressure washer safety standards
- CETA certified for performance +/- 5% of specs listed
- All Shark production plants are ISO-9001 certified for consistent standards

"Tru-Tite" Spring Loaded Self-Tensioning Belt



Swing Out Burner Ring

SNG Model Specs:

Model	Order No.	GPM	PSI	Nozzle	Motor HP	Pump	Voltage	Phase	AMPS	BTU	SHIP WT
SNG4-20024A*	1.109-874.0	3.5	2000	5	5	SD4020R	230V	1 ph	25	310,000	815 lbs
SNG4-22024A*	1.109-875.0	4	2200	5.5	6.2	SM4035R	230V	1 ph	29	364,000	843 lbs
SNG4-22024B*	1.109-876.0	4	2200	5.5	6.2	SM4035R	230V	3 ph	16	364,000	843 lbs
SNG4-22024C*	1.109-877.0	4	2200	5.5	6.2	SM4035R	460V	3 ph	7	364,000	843 lbs
SNG4-22024F*	1.109-878.0	4	2200	5.5	6.2	SM4035R	575V	3 ph	6.5	364,000	843 lbs
SNG4-22024G*	1.109-879.0	4	2200	5.5	6.2	SM4035R	208V	1 ph	30	364,000	843 lbs
SNG4-22024H*	1.109-880.0	4	2200	5.5	6.2	SM4035R	208V	3 ph	18	364,000	843 lbs
SNG4-30024A*	1.109-881.0	3.9	3000	4.5	8.2	SM4035R	230V	1 ph	36	354,000	856 lbs
SNG4-30024B*	1.109-882.0	3.9	3000	4.5	8.2	SM4035R	230V	3 ph	25	354,000	856 lbs
SNG4-30024C*	1.109-883.0	3.9	3000	4.5	8.2	SM4035R	460V	3 ph	11	354,000	856 lbs
SNG4-30024F*	1.109-884.0	3.9	3000	4.5	8.2	SM4035R	575V	3 ph	14	354,000	856 lbs
SNG4-30024G*	1.109-885.0	3.9	3000	4.5	8.2	SM4035R	208V	1 ph	38	354,000	856 lbs
SNG4-30024H*	1.109-886.0	3.9	3000	4.5	8.2	SM4035R	208V	3 ph	27	354,000	856 lbs
SNG5-23024A*	1.109-887.0	5	2300	6.5	8.2	ST5030R	230V	1 ph	36	439,000	856 lbs
SNG5-23024B*	1.109-888.0	5	2300	6.5	8.2	ST5030R	230V	3 ph	25	439,000	856 lbs
SNG5-23024C*	1.109-889.0	5	2300	6.5	8.2	ST5030R	460V	3 ph	11	439,000	856 lbs
SNG5-23024F*	1.109-890.0	5	2300	6.5	8.2	ST5030R	575V	3 ph	14	439,000	856 lbs
SNG5-23024G*	1.109-891.0	5	2300	6.5	8.2	ST5030R	208V	1 ph	38	439,000	856 lbs
SNG5-23024H*	1.109-892.0	5	2300	6.5	8.2	ST5030R	208V	3 ph	27	439,000	856 lbs
SNG5-30024A*	1.109-893.0	4.8	3000	5.5	10	ST5030R	230V	1 ph	40	415,000	885 lbs
SNG5-30024B*	1.109-894.0	4.8	3000	5.5	10	ST5030R	230V	3 ph	26	415,000	885 lbs
SNG5-30024C*	1.109-895.0	4.8	3000	5.5	10	ST5030R	460V	3 ph	15	415,000	885 lbs
SNG5-30024F*	1.109-896.0	4.8	3000	5.5	10	ST5030R	575V	3 ph	14	415,000	885 lbs
SNG5-30024G*	1.109-897.0	4.8	3000	5.5	10	ST5030R	208V	1 ph	49	415,000	885 lbs
SNG5-30024H*	1.109-898.0	4.8	3000	5.5	10	ST5030R	208V	3 ph	32	415,000	885 lbs
SNG6-32024B*	1.109-899.0	6.3	3200	7	15	ST6035R	230V	3 ph	39	507,000	1825 lbs
SNG6-32024C*	1.109-900.0	6.3	3200	7	15	ST6035R	460V	3 ph	19	507,000	1825 lbs
SNG6-32024F*	1.109-901.0	6.3	3200	7	15	ST6035R	575V	3 ph	18	507,000	1825 lbs
SNG6-32024H*	1.109-902.0	6.3	3200	7	15	ST6035R	208V	3 ph	39	507,000	1825 lbs
SNG8-32024B*	1.109-940.0	8	3200	9	20	SX9536R	230V	3 ph	46	658,000	1840 lbs
SNG8-32024C*	1.109-941.0	8	3200	9	20	SX9536R	460V	3 ph	26	658,000	1840 lbs
SNG8-32024F*	1.109-942.0	8	3200	9	20	SX9536R	575V	3 ph	26	658,000	1840 lbs
SNG8-32024H*	1.109-943.0	8	3200	9	20	SX9536R	208V	3 ph	52	658,000	1840 lbs
SNG10-30024B*	1.109-944.0	9.5	3000	11	20	SX1036R	230V	3 ph	52	816,000	1910 lbs
SNG10-30024C*	1.109-945.0	9.5	3000	11	20	SX1036R	460V	3 ph	26	816,000	1910 lbs
SNG10-30024F*	1.109-946.0	9.5	3000	11	20	SX1036R	575V	3 ph	26	816,000	1910 lbs
SNG10-30024H*	1.109-947.0	9.5	3000	11	20	SX1036R	208V	3 ph	60	816,000	1910 lbs

Dimensions: 3.5-5 GPM: 49"L x 24"W x 48"H; **6-9.5 GPM:** 64"L x 35"W x 61"H

***PLEASE NOTE:** Draft diverter required for ETL certification - PN 9.801-040.0 (10"); PN 8.717-730.0 (12").

SLP Model Specs:

Model	Order No.	GPM	PSI	Nozzle	Motor HP	Pump	Voltage	Phase	AMPS	BTU	SHIP WT
SLP4-20024A*	1.109-903.0	3.5	2000	5	5	SD4020R	230V	1 ph	25	310,000	815 lbs
SLP4-22024A*	1.109-904.0	4	2200	5.5	6.2	SM4035R	230V	1 ph	29	364,000	843 lbs
SLP4-22024B*	1.109-905.0	4	2200	5.5	6.2	SM4035R	230V	3 ph	16	364,000	843 lbs
SLP4-22024C*	1.109-906.0	4	2200	5.5	6.2	SM4035R	460V	3 ph	7	364,000	843 lbs
SLP4-22024F*	1.109-907.0	4	2200	5.5	6.2	SM4035R	575V	3 ph	6.5	364,000	843 lbs
SLP4-22024G*	1.109-908.0	4	2200	5.5	6.2	SM4035R	208V	1 ph	30	364,000	843 lbs
SLP4-22024H*	1.109-909.0	4	2200	5.5	6.2	SM4035R	208V	3 ph	18	364,000	843 lbs
SLP4-30024A*	1.109-910.0	3.9	3000	4.5	8.2	SM4035R	230V	1 ph	36	354,000	856 lbs
SLP4-30024B*	1.109-911.0	3.9	3000	4.5	8.2	SM4035R	230V	3 ph	25	354,000	856 lbs
SLP4-30024C*	1.109-912.0	3.9	3000	4.5	8.2	SM4035R	460V	3 ph	11	354,000	856 lbs
SLP4-30024F*	1.109-913.0	3.9	3000	4.5	8.2	SM4035R	575V	3 ph	14	354,000	856 lbs
SLP4-30024G*	1.109-914.0	3.9	3000	4.5	8.2	SM4035R	208V	1 ph	38	354,000	856 lbs
SLP4-30024H*	1.109-915.0	3.9	3000	4.5	8.2	SM4035R	208V	3 ph	27	354,000	856 lbs
SLP5-23024A*	1.109-916.0	5	2300	6.5	8.2	ST5030R	230V	1 ph	36	439,000	856 lbs
SLP5-23024B*	1.109-917.0	5	2300	6.5	8.2	ST5030R	230V	3 ph	25	439,000	856 lbs
SLP5-23024C*	1.109-918.0	5	2300	6.5	8.2	ST5030R	460V	3 ph	11	439,000	856 lbs
SLP5-23024F*	1.109-919.0	5	2300	6.5	8.2	ST5030R	575V	3 ph	14	439,000	856 lbs
SLP5-23024G*	1.109-920.0	5	2300	6.5	8.2	ST5030R	208V	1 ph	38	439,000	856 lbs
SLP5-23024H*	1.109-921.0	5	2300	6.5	8.2	ST5030R	208V	3 ph	27	439,000	856 lbs
SLP5-30024A*	1.109-922.0	4.8	3000	5.5	10	ST5030R	230V	1 ph	40	415,000	885 lbs
SLP5-30024B*	1.109-923.0	4.8	3000	5.5	10	ST5030R	230V	3 ph	26	415,000	885 lbs
SLP5-30024C*	1.109-924.0	4.8	3000	5.5	10	ST5030R	460V	3 ph	15	415,000	885 lbs
SLP5-30024F*	1.109-925.0	4.8	3000	5.5	10	ST5030R	575V	3 ph	14	415,000	885 lbs
SLP5-30024G*	1.109-926.0	4.8	3000	5.5	10	ST5030R	208V	1 ph	49	415,000	885 lbs
SLP5-30024H*	1.109-927.0	4.8	3000	5.5	10	ST5030R	208V	3 ph	32	415,000	885 lbs
SLP6-32024B*	1.109-928.0	6.3	3200	7	15	ST6035R	230V	3 ph	39	507,000	1825 lbs
SLP6-32024C*	1.109-929.0	6.3	3200	7	15	ST6035R	460V	3 ph	19	507,000	1825 lbs
SLP6-32024F*	1.109-930.0	6.3	3200	7	15	ST6035R	575V	3 ph	18	507,000	1825 lbs
SLP6-32024H*	1.109-931.0	6.3	3200	7	15	ST6035R	208V	3 ph	39	507,000	1825 lbs
SLP8-32024B*	1.109-932.0	8	3200	9	20	SX9536R	230V	3 ph	46	658,000	1840 lbs
SLP8-32024C*	1.109-933.0	8	3200	9	20	SX9536R	460V	3 ph	26	658,000	1840 lbs
SLP8-32024F*	1.109-934.0	8	3200	9	20	SX9536R	575V	3 ph	26	658,000	1840 lbs
SLP8-32024H*	1.109-935.0	8	3200	9	20	SX9536R	208V	3 ph	52	658,000	1840 lbs
SLP10-30024B*	1.109-936.0	9.5	3000	11	20	SX1036R	230V	3 ph	52	775,000	1910 lbs
SLP10-30024C*	1.109-937.0	9.5	3000	11	20	SX1036R	460V	3 ph	26	775,000	1910 lbs
SLP10-30024F*	1.109-938.0	9.5	3000	11	20	SX1036R	575V	3 ph	26	775,000	1910 lbs
SLP10-30024H*	1.109-939.0	9.5	3000	11	20	SX1036R	208V	3 ph	60	775,000	1910 lbs

Dimensions: 3.5-5 GPM: 49"L x 24"W x 48"H; **6-9.5 GPM:** 64"L x 35"W x 61"H

PLEASE NOTE: SLP's do not come standard with an LP regulator. Must order part number 9.802-633.0 for the LP regulator.
Draft diverter required for ETL certification - PN 9.801-040.0 (10"); PN 8.717-730.0 (12").

SNG/SLP Options:

9.801-040.0 Draft Diverter

8.917-509.0 Wireless Handheld Transmitter

8.921-774.0 Wired Remote Station - Pump / Burner
(Add 8.921-773.0 to add Detergent Switch to remote station)

8.917-507.0 Auto Start/Stop, Wireless, No Remote



9.807-646.0 Auto Start/Stop Kit, Wired Remote and Lockout

8.917-508.0 Time Delay

- Auto Start/Stop and Time delay kits are easy to install, plug and play

Order No.	DESCRIPTION
LPG Required Items*	
9.802-633.0	LP Regulator Assembly
Field-Installed Options	
8.917-507.0	Kit, Auto Start / Stop- wireless, no remote
8.917-508.0	Kit, Time Delay
8.921-776.0	Kit, Steam Combo
9.807-646.0	Kit, Auto Start / Wired Remote - no lockout function
Remote Station Options	
8.917-509.0	Kit, Wireless Remote Control
8.921-832.0	Wireless Handheld Transmitter
8.917-817.0	Kit, Wall Bracket for Wireless Handheld Transmitter
8.921-774.0	Kit, Wired Remote Station (Pump / Burner)
8.921-773.0	Kit, Wired Remote Station (Detergent)
8.922-157.0	Wired Remote Control Box (can add up to 4) (Pump / burner switch included, add 8.921-773.0 for detergent switch)
Draft Diverters* & Dampeners	
9.801-040.0	Draft Diverter (10") for use with 3.5 to 5.5 GPM models (no adapter needed) for use with 6.3 GPM models (needs 12" x 10" adapter)
8.717-730.0	Draft Diverter (12") for use with 6.3 - 10 GPM models (no adapter needed)
8.753-474.0	Draft Dampener (10')
8.753-478.0	Draft Dampener (12')
8.753-706.0	Reducer, Stack 12" to 10"

**Required items*

PHONE: 800.771.1881
EMAIL: Sales@SharkPW.com

EEC SERIES: All-Electric units ideal for on-demand, indoor cleaning with hot water

Features

- Quiet, enviro-clean and user friendly
- Rust-free stainless steel coil enhances high-efficiency heat transfer
- Auto start-stop for on-demand cleaning
- Shark belt-drive pump with U-Seal technology and 7-year limited warranty
- ETL certified to UL & CSA safety standards

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Pump	KW Hour	Ship Wt
EEC-422007C	1.106-068.0	4.2	2000	6.2	460V / 3ph	55	SM Crankcase	40.5	640 lbs
EEC-353007C	1.106-069.0	3.5	3000	7.5	460V / 3ph	59	SM Crankcase	40.5	640 lbs
EEC-353007F	TBA	3.5	3000	7.5	575V / 3 ph	59	SM Crankcase	40.5	640 lbs

Dimensions: 32"L x 24"W x 52"H

OPTIONS [Factory Installed]

PART NO.	DESCRIPTION
9.801-012.0	Time-Delay Shutdown* *Replaces Auto start-stop
9.801-002.0	Pressure Washer Stainless Steel Cabinet

HEATER ATTACHMENT | ELECTRIC POWERED | DIESEL HEATED

HP HEATER: Turns a cold water pressure washer into a hot water unit

HP Heating Module: Diesel/ oil-heated

Our Shark Series water heater provides supplemental heat to cold water machines, giving users the benefits of hot water cleaning when it's needed. An electric-powered diesel heated unit, the HP-5030D effectively heats water at a rate of up to 5 gallons per minute.

Features

- Effective heating of up to 5 GPM
- ETL certified to UL & CSA safety standards
- High-efficiency design for low operating costs

Model	Order No.	GPM	PSI	Electrical	Amps	Heated By	BTUs	Ship Wt
HP-5030D	1.109-113.0	Up to 5.0	Up to 3000	120V / 1ph	5	Diesel	300,000	320 lbs

29"L x 41"W x 47"H

SPECIALS HEATER | ELECTRIC POWERED | DIESEL OR NATURAL GAS HEATED

SPECIALS HEATER: Turns a cold water pressure washer into a hot water unit

Available in Diesel or Natural Gas

Features

- Effective heating of up to 5.6 GPM @ up to 4000 PSI
- Oil-fired 120V AC / 1ph 5 Amp*
- Oil-fired 12V DC*
- NG Millivolt

*Verify voltage on order

****** Other Heater Models available ******
Call for details & pricing

TRS-2500 Package:
Includes Best-Selling Options

SHIPS IN AN ENCLOSED CRATE!

SSG-503537E/G Skid
4.7 GPM @ 3500 PSI
Honda GX630 engine
Electric start w/ generator

GREAT RETURN ON INVESTMENT!

Includes High-Pressure Hose Reel
(50ft hose included but not installed)

Includes Low-Pressure Hose Reel
(garden hose not included)

Includes Optional Rock Guard
to protect pressure washer from flying objects

Includes Battery Installed Option

Breakaway Tongue
saves on storage space

Includes Saddle Boxes (2)
for extra storage on trailer

Cool bypass feature:
Circulates water back through tank allowing extended run time and pump protection!

Includes Wand, Hose, and Chemical Injector

ASK ABOUT OUR INCREDIBLY LOW SHIPPING RATES!

LEASE OPTIONS AVAILABLE

Model	Order No.	Axle	Load Capacity	Water Tank	Ship Weight
TRS-2500 Package	1.103-828.0	Single	3500 lbs	200 gallon	1815 lbs

Dimensions: 123"L x 75.5"W x 69.5"H

*Price includes complete package shown, details listed below.

PACKAGE INCLUDES:

TRAILER
TRS-2500 Single-axle TRS-2500 trailer w/ 200 gallon tank

BELT-DRIVE PRESSURE WASHER (SEE PAGE 10 FOR DETAILS)
SSG-503537E/G 4.7 GPM @ 3,500 PSI, Gas, 120V AC Burner

MOUNTING KIT
8.917-294.0 SSG Skid Mounting Kit

BATTERY
8.904-051.0 Battery Installed On Pressure Washer

FACTORY INSTALLED
8.917-554.0 High-Pressure Hose Reel
8.917-555.0 Low-Pressure Hose Reel
8.917-556.0 Saddle Boxes (2)
8.917-557.0 Rock Guard

MOST CONTRACTORS CHOOSE THIS PACKAGE BECAUSE:

- EASY TO SERVICE
- EASY TO TOW
- EASY TO USE AND OPERATE
- EASY TO STORE
- EASY TO AFFORD
- BEST PROFESSIONAL OPTIONS AVAILABLE

TRS-2500: New, flexible design accomodates different size pressure washers

(hot water skid, medium size hot-water, cold-water blaster)

Applications: Rental Yards • Construction • Mines • Marine • Property Management • Oil Fields • And More!

Leaf-spring suspension rated up to 3,500 lbs
3-way ball valve for easy switching of the water flow from the holding tank to a faucet
High-density, polyethylene 200-gallon water tank with a 12-inch access port, 1 1/2-inch drain valve, 3/4-inch float valve and a 50-mesh inlet filter
1,000 lb. swivel jack with a 2-inch ball coupler for quick and easy hook up of the trailer
SHIPS IN A CRATE!
Optional hose reels
(hoses on reels field installed)
Lighted license plate holder and recessed tail lights
Battery box
Optional utility rack
Swing-away hitch saves on storage space
Optional saddle box
Two 5/16-inch chains for additional safety
Electrical wiring recessed within channel frame

TRS-2500
Shown with optional SSG hot water pressure washer, hose reels, utility rack, and saddle box options
(accommodates gasoline-powered hot and cold water pressure washers)

Model	Order No.	Axle	Load Capacity	Water Tank	Ship Weight
TRS-2500*	1.103-823.0	Single	3500 lbs	200 gallon	1072 lbs

Dimensions: 123"L x 75.5"W x 69.5"H

*Price includes trailer and water tank only. All trailers MUST be configured to spec.

COMPATIBLE PRESSURE WASHERS:

MODEL	DESCRIPTION
(BELT-DRIVE MODELS: SEE PAGE 10 FOR DETAILS)	
SSG-403037E	3.9 GPM @ 3,000 PSI, GAS, 12V DC Burner
SSG-503027E	4.8 GPM @ 3,000 PSI, GAS, 12V DC Burner
SSG-503027E/G	4.8 GPM @ 3,000 PSI, GAS, 120V AC Burner
SSG-503537E	4.7 GPM @ 3,500 PSI, Gas, 12V DC Burner
SSG-503537E/G	4.7 GPM @ 3,500 PSI, Gas, 120V AC Burner
SSG-603537E	5.6 GPM @ 3,500 PSI, Gas, 12V DC Burner
SSG-603537E/G	5.6 GPM @ 3,500 PSI, Gas, 120V AC Burner
8.917-294.0	**Mounting Kit**, SSG Skids*
DIRECT-DRIVE MODELS - *SEE PAGE 10 FOR DETAILS*	
SGP-403537E	3.5 GPM @ 3,500 PSI, Electric, 12V DC Burner
8.917-295.0	**Mounting Kit**, SGP Model*
COLD WATER BELT-DRIVE MODELS - *SEE PAGE 6 FOR MODELS & DETAILS*	
8.917-296.0	**Mounting Kit**, Any Cold Water Belt Drive*

*Required for mounting pressure washer to trailer

AVAILABLE OPTIONS ARE:

PART NO.	DESCRIPTION
BATTERY	
8.904-051.0	Battery Installed On Pressure Washer
FIELD INSTALLED	
8.917-558.0	Saddle Box (Ea)
8.917-559.0	Rock Guard
8.917-560.0	Utility Rack
FACTORY INSTALLED	
8.917-397.0	Electric Brakes
8.917-553.0	Electric Brake Breakaway Kit
8.917-398.0	Hydraulic Brakes
8.917-554.0	High-Pressure Hose Reel
8.917-555.0	Low-Pressure Hose Reel
8.917-556.0	Saddle Boxes (2)
8.917-557.0	Rock Guard

TRS-3500: Heavy-duty, single-axle pressure washer trailers

Designed for hot-water skid, the TRS-3500 features a rugged, protective chassis design making this heavy-duty single-axle trailer perfect for use on busy construction sites. To customize your pressure washer trailer package, simply:

- **Choose a pressure washer:** Select from 9 models of the Shark SSG hot water pressure washers (see page 10) to create the professional cleaner's dream system.
- **Choose your options:** Customize your trailer with a broad selection of options and accessories, such as hose reels, chrome coverings, etc. A full list is below.

TRS-3500
Shown with options and gasoline-powered hot water pressure washer;
accommodates gasoline-powered pressure washers only

Features include:

- Single axle rated up to 3,300 lbs.
- 200-gallon water tank made of high-density polyethylene with a 12-inch access port, 11/2-inch drain valve, 3/4-inch float valve and a 50-mesh inlet filter
- Two 5/16-inch chains for additional safety
- Electrical wiring recessed within tubular frame;
- Lighted license plate holder and recessed tail lights;
- 1,000 lb. swivel jack and easy hook up of the trailer;
- Two 3-way ball valves for easy switching of the water flow from the holding tank to a faucet;
- Rugged steel cage for security while transporting;
- Many accessories and options available

DESIGNED FOR OIL FIELD APPLICATIONS AND OTHER RUGGED ENVIRONMENTS

Model	Order No.	AxleLoad Capacity	Water Tank	Ship Weight
TRS-3500*	1.103-826.0	Single3300 lbs	200 gallon	840 lbs

Dimensions: 130"L x 73"W x 5 *Price includes trailer and water tank only. All trailers MUST be configured to spec.

PURCHASE WITH THE FOLLOWING SKIDS: (Skid details on page 10)

MODEL	DESCRIPTION
SSG-403037E	3.9 GPM @ 3,000 PSI, GAS, 12V DC Burner
SSG-503027E	4.8 GPM @ 3,000 PSI, GAS, 12V DC Burner
SSG-503027E/G	4.8 GPM @ 3,000 PSI, GAS, 120V AC Burner
SSG-503537E	4.7 GPM @ 3,500 PSI, Gas, 12V DC Burner
SSG-503537E/G	4.7 GPM @ 3,500 PSI, Gas, 120V AC Burner
SSG-603537E	5.6 GPM @ 3,500 PSI, Gas, 12V DC Burner
SSG-603537E/G	5.6 GPM @ 3,500 PSI, Gas, 120V AC Burner

OPTIONS [Factory Installed]

PART NO.	DESCRIPTION
BATTERY	
8.904-051.0	Battery Installed On Pressure Washer
BRAKE: ELECTRIC BRAKE OPTIONS	
8.902-440.0	Electric Brake
8.902-436.0	Height Adjustable Hitch w/ 3-in. Lunette Eye (Replaces Ball Coupler)
8.707-532.0	2-inch Ball Coupler (Fits Height Adjustable Hitch 8.902-436.0 above)
8.707-531.0	2-5/16-inch Ball Coupler (Fits Height Adjustable Hitch 8.902-436.0 above)
8.707-506.0	Kit, Breakaway Actuator with Battery
BRAKE: HYDRAULIC BRAKE OPTION	
8.902-441.0	Hydraulic Brake, with 2-inch Ball Coupler
8.902-453.0	Hydraulic Brake, w/ Height Adjustable Hitch (Specify coupler below)
8.707-532.0	Coupler, 2-inch Ball (Fits Height Adjustable Hitch 8.902-451.0 & 8.902-453.0 above)
8.707-531.0	Coupler, 2-5/16-inch Ball (Fits Height Adjustable Hitch 8.902-451.0 & 8.902-453.0 above)
8.707-534.0	Coupler, 3-inch Lunette Eye (Fits Height Adjustable Hitch 8.902-451.0 & 8.902-453.0 above)

PART NO.	DESCRIPTION
MOUNTING KITS	
8.902-455.0	Skid Mounting & Plumbing Kit (Required for Mounting Pressure Washer to Trailer)
HOSES INSTALLED	
8.915-156.0	High-Pressure Hose, 3/8-inch x 100 ft., 2-Wire, Installed
8.915-155.0	Garden Hose, 3/4-inch x 50 ft., Installed
HOSE REEL KITS (HOSE NOT INCLUDED)	
8.902-447.0	Hose Reel Kit for 100 ft. of 3/8-inch High-Pressure Hose
8.902-448.0	Hose Reel Kit for 200 ft. of 3/8-inch High-Pressure Hose
8.902-449.0	Hose Reel Kit for 75 ft. of 3/4-inch Industrial Garden Hose
SIGNAGE PLATE	
8.902-469.0	Signage Plate
WHEELS AND FENDERS	
8.902-466.0	Chrome Wheels, Pair, w/ ST205/75D15/C Spare Tire
8.902-467.0	Chrome Fenders, Pair

TRS-6000: Heavy-duty, double-axle pressure washer trailers

The TRS-6000 trailer's rugged, heavy-duty double-axle design with 330-gallon water tank allows for long run times making it perfect for cleaning jobs that are far from a convenient water source. To customize your pressure washer trailer package, simply:

- **Choose a pressure washer:** Select from 9 models of the Shark SSG hot water pressure washers (see page 10) to create the professional cleaner's dream system.
- **Choose your options:** Customize your trailer with a broad selection of options and accessories, such as hose reels, chrome coverings, etc. A full list is below.

TRS-6000
Shown with options and
gas-powered hot water pressure washer;
accommodates both gasoline- and diesel-powered pressure washers

Features include:

- Double-axle rated up to 6,000 lbs.
- 330-gallon water tank made of high-density polyethylene with a 12-inch access port, 11/2-inch drain valve, 3/4-inch float valve and a 50-mesh inlet filter
- Two 5/16-inch chains for additional safety
- Electrical wiring recessed within tubular frame
- Lighted license plate holder and recessed tail lights
- 1,000 lb. swivel jack with a 2 5/16-inch ball coupler for quick and easy hook up of the trailer
- Two 3-way ball valves for easy switching of the water flow from the holding tank to a faucet
- Rugged steel cage for security while transporting
- Many accessories and options available

Model	Order No.	Axle	Load Capacity	Water Tank	Ship Weight
TRS-6000*	1.103-827.0	Tandem	6000 lbs	330 gallon	1980 lbs

Dimensions: 178"L x 80"W x 62"H

*Price includes trailer and water tank only.

All trailers MUST be configured to spec.

PURCHASE WITH THE FOLLOWING SKIDS (Skid details on page 10)

MODEL	DESCRIPTION
SSG-403037E	3.9 GPM @ 3,000 PSI, GAS, 12V DC Burner
SSG-503027E	4.8 GPM @ 3,000 PSI, GAS, 12V DC Burner
SSG-503027E/G	4.8 GPM @ 3,000 PSI, GAS, 120V AC Burner
SSG-503537E	4.7 GPM @ 3,500 PSI, Gas, 12V DC Burner
SSG-503537E/G	4.7 GPM @ 3,500 PSI, Gas, 120V AC Burner
SSG-603537E	5.6 GPM @ 3,500 PSI, Gas, 12V DC Burner
SSG-603537E/G	5.6 GPM @ 3,500 PSI, Gas, 120V AC Burner
SSD-603567E	5.6 GPM @ 3,500 PSI, Diesel, 12V DC Burner
SSD-603567E/G	5.6 GPM @ 3,500 PSI, Diesel, 120V AC Burner

OPTIONS [Factory Installed]

PART NO.	DESCRIPTION
MOUNTING KITS	
8.902-455.0	Skid Mounting & Plumbing Kit (Required for Mounting Pressure Washer to Trailer)
BATTERY	
8.904-051.0	Battery Installed On Pressure Washer
BRAKE: ELECTRIC BRAKE OPTIONS (Check your state regulations on trailer brakes)	
8.902-437.0	Electric Brake, One Axle
8.902-445.0	Electric Brake, Two Axles
8.902-436.0	Height Adjustable Hitch w/ 3-in. Lunette Eye (Replaces Ball Coupler)
8.707-532.0	2-inch Ball Coupler (Fits Height Adjustable Hitch 8.902-436.0 above)
8.707-531.0	2-5/16-inch Ball Coupler (Fits Height Adjustable Hitch 8.902-436.0 above)
8.707-506.0	Kit, Breakaway Actuator with Battery
BRAKE: HYDRAULIC BRAKE OPTIONS	
8.902-438.0	Hydraulic Brake, One Axle, with 2-in. Ball Coupler
8.902-446.0	Hydraulic Brake, Two Axles, with 2-in. Ball Coupler
8.902-451.0	Hydr. Brake, One Axle, w/ Height Adj. Hitch (Specify Coupler below)
8.902-452.0	Hydr. Brake, Two Axles, w/ Height Adj. Hitch (Specify Coupler below)
8.707-532.0	Coupler, 2-inch Ball (Fits Height Adjustable Hitch 8.902-451.0 & 8.902-452.0 above)
8.707-531.0	Coupler, 2-5/16-inch Ball (Fits Height Adjustable Hitch 8.902-451.0 & 8.902-452.0 above)
8.707-534.0	Coupler, 3-inch Lunette Eye (Fits Height Adjustable Hitch 8.902-451.0 & 8.902-452.0 above)

PART NO.	DESCRIPTION
HOSES INSTALLED	
8.915-156.0	High-Pressure Hose, 3/8-inch x 100 ft., 2-Wire, Installed
8.915-155.0	Garden Hose, 3/4-inch x 50 ft., Installed
HOSE REEL KITS (HOSE NOT INCLUDED)	
8.902-447.0	Hose Reel Kit for 100 ft. of 3/8-inch High-Pressure Hose
8.902-448.0	Hose Reel Kit for 200 ft. of 3/8-inch High-Pressure Hose
8.902-449.0	Hose Reel Kit for 75 ft. of 3/4-inch Industrial Garden Hose
CHEMICAL RACK	
8.912-409.0	Dual 5 gal. Bucket Chemical Rack
FUEL TANK AND TOOL BOX [Diesel Only - Special Order Option]	
No PN	Fuel & Tool, Tank 45 gal.
No PN	Fuel & Tool, Tank 24 gal.
SIGNAGE PLATE	
8.902-469.0	Signage Plate
WHEELS AND FENDERS	
8.902-466.0	Chrome Wheels, Pair, w/ST205/75D15/C Spare Tire (2 Pair Required for TRS-6000)
8.902-468.0	Chrome Fenders, Pair

SPECIALS

STP Special: Hot Water, Electric Steamer

Capable of 310° hot water!

Features

- 300 PSI @ 2.0 GPM
- Capable of 310 degree hot water
- 120V / 1ph
- 1.5hp motor
- Open gun system
- Comes with steam wand, steam nozzle and steam hose

Call for details

TRS-6000 Special: Heavy-Duty Industrial Design

Perfect for Oil Fields and Mining!

Bulldog Jack Stand

Tamper Proof Controls

Features

- SSD-603537E/G diesel-powered, 3500 PSI @ 5.6 GPM belt-drive hot water skid
- 120V Winco generator
- Completely tamper proof
- Bulldog jack stand (welded)
- Surge brakes one axle w/ 2" ball coupler and 3" Lunette eye
- Downstream chemical injection
- 45-gallon diamond plate fuel & tool box
- 900 series Giant unloader valve

Call for details

SPECIALS

Flat Bed Skid: Slides into the back of a truck or trailer

Features

- 200-gallon water tank
- Comes with (1) high-pressure hose reel and (1) low-pressure hose reel
- Highly customizable with multiple engine choices and options (see SSG skids on page 11)
- Easy access front panel operation
- ETL certified to UL-1776 safety standards
- 4 lifting eyes
- Low water shutoff

Call for details

Stainless Steel Hot Water Skid

Features

- Stainless steel chassis and cage with lifting eyes
- 3500 PSI
- Diesel engine
- Diesel burner
- Corrosion resistance

Perfect for Oil Fields, Oil Rig Platforms and Mining!

Call for details

Dual-Axle Pressure Washer Trailer w/ Recovery System

Features

- 230-gallon water tank
- SSG-503027E/G hot water skid
- Fuel tank & tool box combination
- 50-gallon gas tank for long run times
- 2-gun set-up (guns included with complete set of nozzles)
- (2) 55-gallon drums for water recovery
- Vacuum specs:
  - 4 peak hp
  - 11 amps
  - 105 static PSI (in)
  - 107 cfm @ 2.5 orifice
  - 50 foot vacuum hose
  - Includes wand with pickup tool

(2) 55-gallon recovery drums, (2) 100' high-pressure hoses w/ reels, (1) 50' low-pressure hose w/ reel

Call for details

SHARK JETTERS: Powerful and proven drain cleaning machines

With over 15 years experience manufacturing jetters, Shark offers 3 high-pressure electric jetters and 4 high-pressure gas jetters to the plumbing, rental, jan san and MRO markets.

Features:

- 1500 PSI, 1.7 GPM
- 1-1/2 hp motor, 13 amp w/GFCI
- Durable Triplex pump
- Heavy-duty frame
- 1725 rpm motor = long lasting pump
- Thermal relief valve
- Back flow check valve
- Inlet filter
- Pressure gauge
- Retractable handle on SJPE-1500
- Compact design for easy transport
- **All models come standard with gloves & safety goggles**

SJHE-1500

SJPE-1500

SJPE-1650

All models ETL certified to UL-1776 and CSA safety standards

BASIC MODELS (no hose, no nozzles)

Model	SJHE-1500	SJPE-1500	SJPE-1650
Order No.	1.106-045.0	1.106-046.0	1.106-048.0
GPM	1.7	1.7	1.7
PSI	1500	1500	1500
Motor	1-1/2 hp, 1725 rpm	1-1/2 hp, 1725 rpm	1-1/2 hp, 1725 rpm
Pump	Triplex	Triplex	Triplex
Net Wt	71 lbs	105 lbs	130 lbs

MODELS WITH ACCESSORY KITS

Model	SJHE-1500 (KIT B)	SJPE-1500 (KIT B)	SJPE-1650 (KIT B)
Order No.	1.107-199.0	1.107-201.0	1.107-203.0
Includes	150' 1/4-inch Sewer Hose 25' 1/8-inch Sewer Hose 1/8-inch Sewer Nozzle 1/4-inch Sewer Nozzle	150' 1/4-inch Sewer Hose 25' 1/8-inch Sewer Hose 1/8-inch Sewer Nozzle 1/4-inch Sewer Nozzle	150' 1/4-inch Sewer Hose 25' 1/8-inch Sewer Hose 1/8-inch Sewer Nozzle 1/4-inch Sewer Nozzle

Model	SJHE-1500 (KIT C)	SJPE-1500 (KIT C)	SJPE-1650 (KIT C)
Order No.	1.107-200.0	1.107-202.0	1.107-204.0
Includes	150' 1/4-inch Sewer Hose 75' 1/8-inch Sewer Hose 1/8-inch Sewer Nozzle 1/4-inch Sewer Nozzle	150' 1/4-inch Sewer Hose 75' 1/8-inch Sewer Hose 1/8-inch Sewer Nozzle 1/4-inch Sewer Nozzle	150' 1/4-inch Sewer Hose 75' 1/8-inch Sewer Hose 1/8-inch Sewer Nozzle 1/4-inch Sewer Nozzle

Dimensions:	22"L x 14"W x 13"H	27"L x 17.5"W x 32"H	26"L x 26"W x 38"H

PULSE Technology

Shark's unique Pulse Technology was engineered to do the hard work so you don't have to. The pulsating action breaks the friction between the hose and pipe, allowing the hose to move easily through the pipe, especially around tight curves.

Shark Gas Engine Jetters: Four high-power models

FEATURES:

- Pulse Technology on demand
- Honda or Vanguard engines w/ low oil shutoff
- Electric start standard on SJGDG-3016 and SJGDG-3020 (battery not included)
- Heavy-duty frame
- Hose reel w/ drag brake, rear lock and swivel
- Metal tool box comes standard
- Thermal relief valve
- Back flow check valve
- Inlet filter
- Pressure gauge
- **All models come standard with gloves & safety goggles**

All models ETL certified to UL-1776 safety standards

BASIC MODELS (no hose, no nozzles)

Model	SJDDG-3011	SJGDG-3013	SJGDG-3016	SJGDG-3020
Order No.	1.107-063.0	1.107-067.0	1.107-060.0	1.107-061.0
GPM	4	4	5.5	8
PSI	3000	3000	3000	3000
Engine	Honda 389cc	Honda 389cc	Vanguard 480cc	Honda 614cc
Pump	Triplex Direct-Drive	Triplex Direct-Drive	Triplex Gear-Drive	Triplex Gear-Drive
Net Wt	173 lbs	203 lbs	280 lbs	375 lbs

MODELS WITH ACCESSORY KITS

Model	SJDDG-3011 (KIT B)	SJGDG-3013 (KIT B)	SJGDG-3016 (KIT B)	SJGDG-3020 (KIT B)
Order No.	1.107-205.0	1.107-207.0	1.107-209.0	1.107-211.0
Includes	200' 3/8-inch Sewer Hose, 3/8-inch Sewer Nozzle	200' 3/8-inch Sewer Hose, 3/8-inch Sewer Nozzle, Chemical Injector, Gun, Wand, and 50' 3/8-inch High Pressure Hose	250' 3/8-inch Sewer Hose, 3/8-inch Sewer Nozzle, Chemical Injector, Gun, Wand, and 50' 3/8-inch High Pressure Hose	250' 3/8-inch Sewer Hose, 3/8-inch Sewer Nozzle, SHR-300 300' Cart Hose Reel, Chemical Injector, Gun, Wand, and 50' 3/8-inch High Pressure Hose

Model	SJDDG-3011 (KIT C)	SJGDG-3013 (KIT C)	SJGDG-3016 (KIT C)
Order No.	1.107-206.0	1.107-208.0	1.107-210.0
Includes	200' 3/8-inch Sewer Hose, 150' 1/4-inch Sewer Hose, 1/4-inch and 3/8-inch Sewer Nozzles, and SHR-300 300' Cart Hose Reel	200' 3/8-inch Sewer Hose, 150' 1/4-inch Sewer Hose, 1/4-inch and 3/8-inch Sewer Nozzles, SHR-300 300' Cart Hose Reel, Chemical Injector, Gun, Wand, and 50' 3/8-inch High Pressure Hose	250' 3/8-inch Sewer Hose, 150' 1/4-inch Sewer Hose, 1/4-inch and 3/8-inch Sewer Nozzles, SHR-300 300' Cart Hose Reel, Chemical Injector, Gun, Wand, and 50' 3/8-inch High Pressure Hose

SHR-300 Cart Reel (hose not included)

SHR-200 Hose Reel

OPTIONAL ACCESSORIES

Model	Order No.	Description
SHR-200HR	8.902-989.0	200' Hose Reel
SHR-200FP	8.902-990.0	200' Hose Reel w/ Foot Pedal

Model	Order No.	Description
SHR-300	8.902-985.0	300' Portable Cart Hose Reel
SFP	8.902-986.0	Foot Pedal

Drain Auger: Available in a manual crank and drill adaptable models

Applicable for both indoor and outdoor small drain pipes (1-✣" to 3"), Shark's drain augers are designed to be simple to use and easy to handle. Simply release the locking screw, insert the soft shaft into the pipe, latch the lock and rotate the handle. The metal barrel core ensures cleaner and more convenient use.

- For use in 1-1/4" to 3" pipes
- Quickly opens clogged kitchen, bathroom and laundry sinks
- Anti-twisting / anti-kinking inner core cable

Order No.	Model	Description
8.753-185.0	DSH-1	Drain Auger
8.753-186.0	DSP-10	Drain Auger w/ Drill Adapter*
8.753-184.0	DSH-3	Closet Auger

**Drill not included.*

Drain Plunger: Force pump for clearing drain clogs

- Quickly and easily removes blockages in drain, toilets, sinks, baths and waste pipes
- Comes with 3 adaptors for use on different sewer lines
- Removable handle for easy and comfortable operation
- Double sided sealing lip for optimal pressure

Order No.	Model	Description
8.753-187.0	DSH-2	Drain Plunger

Foot Controlled Pressure Valve

Operators of sewer and tube cleaning equipment need both hands free to feed or retract the hose in the sewer line. Foot operated valve allows hands-free control.

8.710-134.0

8.709-972.0

Features

- Inlet 3/8" - outlet 1/4"
- Up to 12 GPM max flow
- Up to 5000 PSI max pressure
- Brass body - stainless steel valve
- Steel cover for safety

Order No.	PSI	Description
8.902-986.0	4000	Shark SFP foot valve
8.710-134.0	3000	Sewer cleaner foot valve
8.709-972.0	5000	Foot valve w/ ST-2305*
8.701-657.0	-	Repair kit - foot valve
8.701-673.0	-	Repair kit ST-2305
8.711-526.0	-	Kit, 25' hose, #4.5 nozzle, foot valve

** Heavy gauge steel construction for durability and stability*

Sewer Hose: Super flexible sewer line hose

Hose and couplings have small outside diameter, allowing hose and nozzles to fit through sewer line. Sewer line has Super Tough poly-ether cover over ultra-flexible nylon tube. (1/8" sewer nozzle and hose will operate through many 1-1/2" lines) ***Nozzles not included.***

- 150°F max temperature
- Nylon tube, poly-ether cover

1/8" Hose	
Order No.	**Description**
1/8" Hose - 4800 PSI, 1/4" inlet / 1/8" outlet	
8.705-601.0	1/8" x 25'
8.705-602.0	1/8" x 50'
8.705-603.0	1/8" x 100'

1/4" Hose	
Order No.	**Description**
1/4" Hose - 2600 PSI, 1/4" inlet / 1/4" outlet	
8.705-607.0	1/4" x 50'
8.705-608.0	1/4" x 100'
1/4" Hose - 4400 PSI, 1/4" inlet / 1/4" outlet	
8.705-610.0	1/4" x 50'
8.705-611.0	1/4" x 100'

Sewer Nozzles: Stainless steel sewer nozzles

Features
- 4100 PSI max pressure
- Corrosion-resistant stainless steel
- One forward orifice
- Three rear orifices

Order No.	Nozzle / Size
8.710-905.0	1/8" / 5.0
8.710-906.0	1/8" / 5.5
8.710-907.0	1/8" / 6.0
8.710-908.0	1/4" / 6.5
8.710-909.0	1/4" / 7.0
8.710-910.0	1/4" / 9.5

Pipe Cleaning Nozzles

The reverse jets on the fixed and rotary nozzles pull the hose through the tube or sewer line and blast debris from line or tube walls. Fixed nozzles also have forward orifice to blast blockage out of the way.

Features - Standard Sewer Nozzle
- Blast forward and back
- Clears clogs and flushes out lines
- 4200 PSI max pressure

Features - Rotating Sewer Nozzle
- Adds extra agitation
- 3000 PSI max pressure
- Back Jet Only

Duct Cleaner

Rotating Nozzle

Order No.	Nozzle / Size
Rotating Nozzle	
8.710-899.0	1/8" / 5.5
8.710-898.0	1/4" / 5.5
8.710-900.0	1/4" / 8.0
Duct Cleaner	
8.710-887.0	1/4" / 5.5

Order No.	Nozzle / Size
8.710-875.0	1/8" / 5.0
8.710-874.0	1/8" / 5.5
8.710-878.0	1/4" / 4.5
8.710-876.0	1/4" / 5.5
8.710-877.0	1/4" / 6.0
8.710-880.0	1/4" / 7.5
8.710-879.0	1/4" / 8.0
8.710-881.0	1/4" / 12
8.710-885.0	3/8" / 4.0
8.710-884.0	3/8" / 5.5
8.710-886.0	3/8" / 8.5
8.710-883.0	3/8" / 12
8.710-882.0	3/8" / 14

** Back jet only*

Accessories for KG & RG Pressure Washers

RG: Gasoline-powered, direct-drive for residential use

KG: Gasoline-powered, direct-drive

Complete the RG and KG pressure washer package with these popular accessories, including hoses, wands and trigger guns.

Order No.	Description	Units
9.162-320.0	Hose, 50', 3000 PSI, 22MM Ends	KG-252437 & KG-262637
9.162-323.0	Hose, 50', 4000 PSI, 22MM Ends	KG-313137, KG-403637, RG-364037
9.162-321.0	Hose, 25', 3000 PSI, Thermal Plastic, 22MM Ends	RG-232637 & RG-253037
9.112-017.0	Extended Trigger Gun, 4000 PSI	KG-313137 & KG-403637
9.112-012.0	Extended Trigger Gun, 3000 PSI	RG-232637 & RG-253037
9.802-220.0	Wand, 18" M22 X 1/4" Q/C	KG Series
9.112-527.0	Wand, 20", 4000 PSI, with Quick Connect	RG-364037
9.112-533.0	Wand, with Quick Disconnect	RG-232037 & RG-253037

Tachometer / Hour meter

8.904-540.0.0

- Extremely rugged and tamper-proof
- Sealed from dirt and moisture

Order No.	Description	
	8.904-540.0	Tachometer/Hour Meter 12VDC

Shark Industrial Sandblasters

For the extra-tough cleaning jobs, wet-sandblasting is the dust-free solution. Shark's sandblasters attach to a cold-water pressure washer and, using a venturi, mixes sand or other abrasive media with the high-pressure spray to create enough cleaning power to strip paint off concrete and barnacles from a ship's hull.

The sandblasting nozzle is made of tungsten carbide for long life. There are two models; a top-of-the-line steel pot (photo below on right) with tight-fitting lid, or with a probe only.

Other features include:
- Quick-connect coupler for ease in attaching sand probe or pot
- Valve for metering the flow of the media
- Tubed pneumatic tires for easy maneuvering

Rating: Super-duty
Recommended Usage: Heavy
Attaches to: Any cold-water pressure washer with minimum volume of 4 GPM

Old No.	Order No.	Description
4-011201	8.904-470.0	Sandblaster w/ Probe and Pot (carbide)
4-011211	8.904-472.0	Sandblaster w/ Probe (carbide)

8.904-472.0

8.904-470.0

Mosmatic Surface Cleaners & Duct Cleaner

Turbo Surface Cleaner

Delivers high-pressure performance with low maintenance for any hot or cold pressure washer. Completely stainless steel design makes this the toughest surface cleaner available in the pressure cleaning market.

- 250°F
- 4000 PSI
- 6.5lbs

Swiss engineered with high RPM Swivel features reinforced self-lubricated stainless steel ball bearings and dual spring based carbide seal bushings for long-lasting operation under tuff conditions.

Ideal for Pressure Washer Contractor to clean Walls, Ceilings, Public Facilities, Tile Floors and other hard to reach areas. Uses 1/8" meg 1503 nozzles.

Duct Cleaner

- 250°F
- 4000 PSI
- 2lbs
- Inlet Ports: 3/8" NPTF

Designed as an accessory for use with high pressure pumps or pressure washers. Cleans Ducts, Chutes, Vents, Restaurant Exhausts, Tanks, etc.

Self rotating and feeding stainless steel triple bearing system for constant easy turning. Nozzle holders are 1/8" NPTF. Nozzles are sold separate.

12" Surface Cleaner

- 250°F
- 4000 PSI
- 9lbs
- 12" SS Cover

Designed for effortless cleaning of small areas including walls and angled surfaces.

High RPM swivel with integrated toggle joint and adjustable tension system.

Order No.	Description	PSI
8.749-911.0	Surface Cleaner - 12"	4000
8.712-284.0	Turbo Cleaner - 8"	4000
8.712-280.0	Duct Cleaner TYR-2s, Adjustable 6"	4000
8.712-279.0	Duct Cleaner TYR-2s, Fixed 6"	4000

Mosmatic With Recovery - Recover water & dirt while cleaning

These surface cleaners are based off the Mosmatic 12" surface cleaning, with an added recovery system. The specially designed recovery system will allow you to recover the water and dirt from your cleaning area in one pass.

Model FL-AHB-KAU comes with a Gum Remover Scraper, and also has an optional Gum Remover Nozzle (sold separately). The special gum remover nozzle is mounted on the back of the cleaner. The right hand gun is for the surface cleaner and the left hand gun is for the gum remover, or other tough spots. The flat angle of the nozzle lifts and breaks up the gum for easy removal.

- 250°F
- 5000 PSI
- 21" cleaning width
- Stainless steel guard with adjustable housing
- 4 stainless steel castors for easy maneuvering in tight spaces
- Withstands up to 5000 PSI
- Gum remover nozzle*

*Sold separately for model FL-AHB-KAU 520 only

Vacuum hose not included

Order No.	Model	Description	PSI
8.751-299.0	FL-AH 520	Surface Cleaner w/ Recovery	5000
8.751-300.0	FL-AHB-KAU 520	Gum Remover w/ Recovery	5000
8.751-301.0		Gum Remover Nozzle* *Sold separately, for 8.751-300.0*	5000

Mosmatic Roof Cleaner

Industrial quality tool specially designed for efficient, high pressure roof cleaning while keeping the operator in a safe area.

- 21-inch
- 4000 PSI
- 250°F
- 31.9 lbs.
- Pressure gauge
- Ball valve
- Adjustable Wheels (height & width)
- Safety eye connection for rope or cable
- (2) 1/8" nozzles sold separately

Order No.	Description
8.749-910.0	Mosmatic Roof Cleaner

Rotary Surface Cleaner

The NEW Rotary Surface Cleaner is the affordable way to clean flat surfaces fast without leaving "striping" often caused when using a wand.

Specs:

- 2000 - 4000 PSI
- 3.0 - 8.0 GPM
- 212°F Max Temp
- 2500 Max RPM
- Weight: 26 lbs (21")
  29 lbs (24")

Common Uses:

- Removes deposits, mass, algae, fuel, oil and grease from flat surfaces such as drive through pads, boat ramps, tennis courts, roofs, pools, decks, walkways, factory floors, semi trailer floors, fishing docks and loading docks.
- Cleaning stubborn stains from asphalt and concrete surfaces
- Disinfection for the highest hygiene demands in saunas, bathroom areas and in the catering/restaurant industries
- Great for cleaning driveways and sidewalks!

Benefits:

- Huge time savings
- Easy, effortless work
- Substantially lower cost (especially saves on labor cost)
- Visibly greater cleanliness
- Use with hot or cold water
- Circular design allows a zero wall clearance
- Hover action (cleaner floats above ground)
- Eliminates streaking and fatigue

Comparison Chart

The following comparison chart shows the typical time taken to clean a typical driveway (37 sq. meter).

Attachment	Time
Rotary Surface Cleaner	10 min.
Standard Spray Nozzle	80 min.

Order No.	Description
8.753-572.0	21" Surface Cleaner (A+SC21)
8.753-573.0	24" Surface Cleaner (A+SC24)

Cyclone Rotary Surface Cleaner

The "Cyclone" rotary surface cleaner can be used with most hot and cold water washers. It reduces overspray and zebra striping. Great for warehouse floors, sidewalks, pool decks, parking lots, etc.

- 4-10 GPM
- 2000 - 3500 PSI
- Handles water temp up to 200°F
- Polyethylene housing
- Collapsible handle
- Pneumatic tires
- 20" diameter surface cleaning
- Up to 5 gpm
- Weight: 35 lbs

Order No.	Description
8.903-608.0	"Cyclone" Surface Cleaner

Whisper Wash Flat Surface Cleaners

The "Big Guy"

- Powder coated aluminum housing
- Oversized, self-lubricating twin thrust bearings
- Choice of 2 or 4 nozzles
- 10" pneumatic tires, 4" caster
- Crafted with durable stainless steel & aircraft aluminum
- Handles water temp up to 212°F
- 4-10 GPM
- Dimensions: 28" x 44" x 12"
- Weight 48 lbs

Order No.	Description
8.710-074.0	Whisper Wash Big Guy 2 Nozzles
8.710-075.0	Whisper Wash Big Guy 4 Nozzles
8.750-604.0	Swivel, Complete Big Guy & Classic
8.701-879.0	Repair Kit, Seal, Big Guy & Classic
8.701-874.0	Spraybar, 4 Nozzle, Big Guy
8.701-876.0	Spraybar, 2 Nozzle, Big Guy

The "Maxima 36"

- Portable Breakaway Handle
- Handles water temp up to 212°F
- 4-10 GPM
- 2500 RPM
- Dimensions: Cover: 36" Handle: 77"
- Weight 37 lbs

Order No.	Description
8.710-089.0	Maxima 36 Surface Cleaner

The Ultra Clean HC

- ABS Housing
- 2" nylon brush
- Powder coated handle
- Handles water temp up to 185°F
- 3-6 GPM
- Dimensions: 16" x 43" x 9"
- Weight 19 lbs

Order No.	Description
8.710-071.0	Whisper Wash Ultra Clean HC

The Classic

- Portvable breakaway handle
- ABS Housing
- 2" nylon brush
- Handles water temp up to 212°F
- 4-10 GPM
- Dimensions: 19" x 77" x 12"
- Weight 28 lbs

Order No.	Description
8.710-073.0	Whisper Wash Classic
8.750-604.0	Swivel, Complete Big Guy & Classic
8.701-879.0	Repair Kit, Seal, Big Guy & Classic

High-Pressure Hose: Made of abrasion-resistant, steel-wire braid

A

B

C

Shark's easy-to-identify hose is made of the highest quality. Tested to ISO 6945 / DIN 20024, it has proven to have up to seven times more abrasion resistance than other brands yet is 20% more flexible.

Features
- Maximum-strength Class A ORS
- 20% More flexible than other brands
- Unique high-endurance wire braid

	Order Number	PSI Rating	Hose Length	Wire Braid	Inside Diameter	Hose Color	Hose Guard Color
A	8.739-020.0	4000	25 ft.	Single	3/8"	Black	Black
	8.739-021.0	4000	50 ft.	Single	3/8"	Black	Black
	8.739-033.0	4000	100 ft.	Single	3/8"	Black	Black
	8.739-066.0	5800	50 ft.	Double	3/8"	Black	Red
	8.739-224.0	5000	50 ft.	Double	3/8"	Black	Red
	8.739-226.0	5000	100 ft.	Double	3/8"	Black	Red
B	8.740-260.0	4500	50 ft.	Double	3/8"	Blue	Red
	8.739-210.0	4500	100 ft.	Double	3/8"	Blue	Red
C	8.711-722.0*	4500	50 ft.	Double	3/8"	Blue	Red
	8.739-421.0	3000	50 ft.	Single	1/2"	Black	Black
	8.739-423.0	3000	100 ft.	Single	1/2"	Black	Black
	8.739-425.0	5000	50 ft.	Double	1/2"	Black	Red
	8.739-427.0	5000	100 ft.	Double	1/2"	Black	Red

*Equipped with coupler and nipple

Blue hoses are non-marking

Hose Reels: Revolutionary 360° swivel design makes for easy handling

A

B

C

D

The Shark pivot hose reel features a sturdy, lockable, 360° swivel design so it is always aligned with the hose for tangle-free pressure washing. There are two types: pivot and standard (non-pivot). All are rated at 5000 PSI and 325°F to meet maximum limits of standard 3/8-inch high-pressure hoses. Reels range in three sizes to handle 100, 200 or 400 feet of high-pressure hose and carry a two-year warranty. Features include: stainless steel rotor and dual seal swivel, "flip-over" hose guide, spring-action pin to prevent slippage when winding hose and easy-to-engage cam-lever brake. It is the standard in the industry!

Features
- Rugged steel with all-weather powder coat finish
- 2-year, leak-free warranty
- Flip-over' hose guide for protection against injury
- Spring-action stainless steel pin prevents slippage
- Hard-pull protection

2 YEAR LIMITED WARRANTY

	Old No.	Order No.	Description	Hose Capacity
A		8.750-485.0*	Pivot reel, 360° swivel	for 100 ft. of 3/8" hose
		8.750-482.0*	Pivot reel, 360° swivel	for 200 ft. of 3/8" hose
B	4-02755030	9.804-067.0*	E-ZEE Reel, non-pivot	for 100 ft. of 3/8" hose
C		8.750-476.0*	Hose Reel, non-pivot	for 100' of 3/8" hose
		8.750-479.0*	Hose Reel, non-pivot	for 200' of 3/8" hose
	4-02043505C	8.711-638.0	Jumper Connection Hose Connects hose reel to pressure washer Fits all Shark hot water models	5 ft. of 3/8" hose
D	4-02750001	8.711-858.0*	Cox hose reel	for 175 ft. of 1/2" hose
		9.802.045.0	Pipe Bushing 1/2" x 3/8"	for Cox Hose Reel

*** Mounting bracket, jumper hose and connections not included. See next page for mounting brackets.**

For best results on optional hose reels, view options listed under specific machines

Hose Reel Mounting Brackets

8.919-441.0

8.919-445.0

8.919-448.0

8.919-434.0

8.919-072.0

8.919-437.0

8.919-430.0

9.118-021.0

9.118-020.0

Order No.	Description	Use With
8.919-441.0	45° Support Arm	Non-Pivot Hose Reel
8.919-445.0	90° Support Arm	Non-Pivot Hose Reel
8.919-448.0	Vertical Support Arm	Non-Pivot Hose Reel
8.919-072.0	Bracket for SGP Machines	Non-Pivot Hose Reel
9.803-841.0	Bracket for STP Machines	E-ZEE Hose Reel ONLY
8.919-430.0	Universal Support Bracket	Pivot Hose Reel
8.919-437.0	Wall Mount Bracket	Pivot Hose Reel
8.919-434.0	Base Mount Bracket	Pivot Hose Reel
8.919-794.0	Skid Pivot Mount Bracket	Pivot Hose Reel
9.118-021.0	Swivel Bracket	Pivot Hose Reel
9.118-020.0	Swivel Bracket	Pivot Hose Reel

Trigger Guns: Insulated, ergonomic design reduces buzzing in hands

Shark offers the highest quality trigger guns able to withstand pressures of up to 5000 PSI. All are insulated and feature a fatigue-free design for reducing the strain and numbing effect of continuously operating a pressure washer.

Features
- Insulated for operator protection
- Fatigue-free design to alleviate numbing effect of continuous power washing

Order No.	Description	PSI	GPM	Temp Rating
A 8.751-214.0	Legacy Ind. Trigger Gun	5000	12	300°F
8.710-384.0	ST-1500 Trigger Gun	5000	10.4	300°F
B 8.710-394.0	Giant Gun 21290C	5000	10	300°F
C 8.711-339.0*	Wand, Gun & Coupler Assembly	5000	7.6	320°F
8.750-247.0	M407 Trigger Gun	4000	7	250°F

*Includes gun, wand and coupler for use with 5000 PSI pressure washers

Order No.	Description	Use With
8.751-119.0	Valve Kit	Legacy Ind. Trigger Gun

Dump Guns: Water continues to run through the tube even when trigger gun is closed

Shark dump guns are great for cleaning stadiums or if you need to leave pressure washer in extended bypass.

Features
- PSI: 3000; GPM: 10.5
- Temp: 140°F

Order No.	Length	PSI	GPM	Temp Rating
8.710-405.0	16"	3000	10.5	140°F
8.710-406.0	40"	3000	10.5	140°F
8.704-169.0	Dump Gun Repair Kit			

Wands: Stainless steel and chrome plated for point-and-shoot action

There is a Shark wand to meet every cleaning need. There are both stainless steel and economical chrome-plated models for both the variable pressure and straight through wands with lengths ranging from 30 to 79-inches.

Features
- Easy to attach
- Stainless steel or chrome-plated
- Varying lengths up to 79 inches

	Order No.	Length	Functionality	Made Of	Insulated	Coupler
A	8.783-039.0	30"	Side Handle	Chrome Plated	No	Yes
A	9.802-219.0	36"	Side Handle	Chrome Plated	No	Yes
A	8.783-040.0	44"	Side Handle	Chrome Plated	No	Yes
B	9.802-222.0	36"	Variable Pressure	Chrome Plated	Yes	Yes
C	8.711-279.0	31"	Straight Through	Stainless Steel	No	No
C	8.711-281.0	40"	Straight Through	Stainless Steel	No	No
C	8.711-290.0	72"	Straight Through	Stainless Steel	No	No
D	9.803-805.0	35.5"	Straight Through	Stainless Steel	Yes	Yes

Telescoping Wand: Extends cleaning reach to as high as 24 feet

Reaching high places with a pressure washer just got easier with Shark's telescoping wand. Made of light-weight fiber-glass and aluminum, it's the easiest handling extension wand on the market for cleaning multi-story buildings at heights of up to 24-feet and at up to 3000 PSI.

Features
- Extends up to 24 feet
- Light and balanced for ease in cleaning
- Made of fiberglass and aluminum
- For use up to 300°F

Order No.	Description	Length
8.710-589.0	Telescoping wand with shut-off gun, 4000 PSI	6 - 12 ft.
8.710-590.0	Telescoping wand with shut-off gun, 4000 PSI	6 - 18 ft.
8.710-591.0	Telescoping wand with shut-off gun, 4000 PSI	6 - 24 ft.
8.700-059.0	Telescoping wand shoulder strap and belt	

Gun, Lance And Hose Kits: Used with RG & KG cold water pressure washers

Order No.	Description
9.802-223.0	Insulated Lance w/ Gun
9.802-220.0	Lance w/ Coupler (not shown)
8.711-285.0	Lance w/ #3 Hi/Low Varifan Nozzle
8.711-531.0	1/4" x 25' Thermoplastic Hose, 22mm both ends

Gun, Lance And Hose Kits: Used with cold water pressure washers

Kit 1 - 3000 PSI Includes:
- Teflon Tape
- Hose, 3000 PSI 3/8 x 50', R1
- QC Nozzle, SS 1/4" #4.0x15
- Coupler, 3/8" Female brass
- Wand, 18" M22 x 1/4" QC
- Gun, S2 3/8" inlet, Lance w/M22 coupler

Order No: 8.903-454.0

Kit 2 - 5000 PSI Includes:
- Teflon Tape
- Hose, 5000 PSI 3/8 x 50', R2
- QC Nozzle, SS 1/4" #4.0x15
- Coupler, 3/8" Female brass
- Wand, 18" M22 x 1/4" QC
- Gun, S2 3/8" inlet, Lance w/M22 coupler

Order No: 8.903-455.0

Quick Couplers: The fast and easy way to attach wands and nozzles

A

B

C

Shark quick couplers are the easy way to attach high-pressure nozzles and hoses. Couplers are made of brass and withstand pressures of up to 3500 PSI. Nipples are a zinc-plated, hardened steel also rated for up to 3500 PSI.

Features
- Precision design
- For spray pressure of up to 3500 PSI
- Made of rust-free materials

A	Order No.	Size	Function	Thread
	9.802-164.0	1/4"	Coupler	Female
	9.802-165.0	1/4"	Coupler	Male
	9.802-166.0	3/8"	Coupler	Female
	9.802-169.0	3/8"	Coupler	Male

B	Order No.	Size	Function	Thread
	8.707-136.0	1/4"	Nipple	Female
	8.707-139.0	1/4"	Nipple	Male
	9.802-170.0	3/8"	Nipple	Female
	9.802-171.0	3/8"	Nipple	Male

C	Order No.	Description
	8.902-421.0	Two Gun Tee Coupler

Parts Box: Quick access to the most commonly used replacement parts for Shark pressure washers

Keep replacement parts at the tip of your fingers with the Shark Parts Box. It includes an assortment of the most commonly used replacement parts conveniently sorted in a heavy-duty tote box. (Individual parts in the box are listed below with costs.)

Order No. 8.903-421.0

Old No.	Order No.	Description	Quantity Per Kit
2-2000	9.802-164.0	1/4" Female Quick Coupler	4
2-2001	9.802-165.0	1/4" Male Quick Coupler	4
2-2002	9.802-166.0	3/8" Female Quick Coupler	4
2-2003	9.802-169.0	3/8" Male Quick Coupler	4
2-2006	9.802-170.0	3/8" Female Plug	4
2-1902	9.804-016.0	Water Inlet Strainer	4
2-0121	9.802-100.0	3/8" HNBR O-Ring	20
2-0119	9.802-096.0	1/4" HNBR O-Ring	20
4-12803015	9.802-288.0	3.0 15° Spray Nozzle	4
4-12803025	9.802-289.0	3.0 25° Spray Nozzle	4

Old No.	Order No.	Description	Quantity Per Kit
4-12803515	9.802-292.0	3.5 15° Spray Nozzle	4
4-12804015	9.802-296.0	4.0 15° Spray Nozzle	4
4-12804025	9.802-297.0	4.0 25° Spray Nozzle	4
4-16540	9.802-311.0	65° Soap Nozzle	4
2-10942	9.802-146.0	Inlet Swivel with Strainer	1
2-2007	9.802-171.0	3/8" Male Plug	4
2-3409	9.802-192.0	Rupture Disk	1
2-30082	9.802-182.0	1/2" Thermal Relief Valve	2
2-1904	9.802-160.0	Detergent Tube Strainer	4

Twist Seal couplers: Allow U.S. standard hose to connect to European (22mm fittings)

Order No.	Description
8.709-522.0	1/4" FPT
8.709-530.0	3/8" FPT
9.802-173.0	1/4" MPT
8.709-526.0	3/8" MPT

O-Rings

Order No.	Description
8.706-703.0	O-Rings: **4**- 3/8" & **6**- 1/4"
9.802-096.0	O-Rings, 1/4" (Individual)
9.802-100.0	O-Rings, 3/8" (Individual)

Fuel Filter / Water Separator

Order No.	Description
8.725-306.0	Complete Unit
8.725-307.0	Element Only

Test Gauges: Monitor operational pressure and temperature



These high-quality gauges attach to various components on the pressure washer to monitor fuel or water pressure as well as water temperature for maintenance purposes.

Features
- Quick couples to discharge
- Glycerin filled gauges

	Order No.	Description	PSI
A	8.712-208.0	Pressure Gauge Kit	0-5,000
B	8.904-558.0	Pressure/Temperature Test Set	0-10,000

UNLOADERS: Relieve line pressure in bypass mode

9.803-899.0

Order No.	Description
9.175-018.0	Universal Unloader
9.803-899.0	Unloader for Legacy pumps
9.803-900.0	Unloader for Legacy pumps

Standard Nozzles: Replacements for Shark pressure washers

Make sure you ask for genuine Shark replacement nozzles. Made of hardened stainless steel and color-coded for ease of selecting, these nozzles come in convenient bubble packs containing the four most commonly used fan sprays: 0°, 15°, 25° and 40° plus a soap nozzle.

Features
- Packets: 4 high-pressure, 1 soap nozzle
- Made of hardened stainless steel
- Color-coded for ease in selecting

	Order No.	Size	Description of Package Contents
	8.708-719.0	3	SET OF 5: 0°, 15°, 25°, 40°, Soaper
	9.104-014.0	3.5	SET OF 5: 0°, 15°, 25°, 40°, Soaper
	8.708-721.0	4	SET OF 5: 0°, 15°, 25°, 40°, Soaper
	9.104-015.0	4.5	SET OF 5: 0°, 15°, 25°, 40°, Soaper
	8.708-723.0	5	SET OF 5: 0°, 15°, 25°, 40°, Soaper
	8.708-724.0	5.5	SET OF 5: 0°, 15°, 25°, 40°, Soaper
	8.708-725.0	6	SET OF 5: 0°, 15°, 25°, 40°, Soaper
	8.711-267.0	7	SET OF 5: 0°, 15°, 25°, 40°, Soaper

Rotary Nozzles: Legacy's Revolution attaches to all pressure washers



The Legacy Revolution rotary nozzle is rated for up to 4350 PSI at 185°F. Turning at an astounding 4000 RPM, the Revolution delivers faster and deeper cleaning action for the price of a 3000 PSI rotary nozzle.

Features
- Greater cleaning power
- Longer operating life
- Extra durable and versatile

Nozzles		
Order No.	Orifice	PSI
9.302-242.0	3.5	4350
9.302-243.0	4.0	4350
9.302-244.0	4.5	4350
9.302-245.0	5.0	4350
9.302-246.0	5.5	4350
9.302-247.0	6.5	4350
9.302-248.0	7.0	4350
9.302-249.0	10.0	4350

Repair Kits	
Order No.	Orifice
2.884-972.0	3.5
2.883-824.0	4.0
9.302-231.0	4.5
2.883-823.0	5.0
2.883-822.0	5.5
9.302-234.0	6.5
2.884-974.0	7.0
2.884-975.0	10.0

Nozzle Filter: Protects rotary nozzle from being damaged by debris

This nozzle filter, with its 100-mesh screen, is attached between the rotary nozzle (see listing above) and the wand to filter out and prevent debris from damaging the ceramics in the rotary nozzle thus extending the life of the rotary nozzle. It is rated to handle flow pressure of up to 5000 PSI.

Features
- 1/4" MPT outlet
- 300°F maximum temperature
- 100-mesh screen

	Order No.	Made Of	Inlet	Outlet
	8.710-149.0	416 Stainless Steel	1/4-inch QC	1/4-inch MPT

Nozzle Size Selection Chart

Determine the nozzle size by the pressure washer's GPM @ PSI (gallons per minute @ a specific pounds per square inch). If the nozzle size is too small, your equipment can be damaged. If the nozzle size is to large, cleaning ability is compromised. Nozzle fan degree does not effect nozzle size selection.

Standard Nozzle Size	Hole Size	Gallons Per Minute - GPM	Pounds Per Square Inch (PSI)																
			500	750	1000	1250	1500	1750	2000	2250	2500	2750	3000	3250	3500	3750	4000	4500	5000
2	.034"/0.86mm		0.71	0.87	1.00	1.12	1.22	1.32	1.41	1.50	1.58	1.66	1.73	1.80	1.87	1.94	2.00	2.12	2.24
2.5	.042"/1.07mm		0.88	1.08	1.25	1.40	1.53	1.65	1.77	1.88	1.98	2.07	2.17	2.25	2.34	2.42	2.50	2.65	2.80
3	.043"/1.09mm		1.06	1.30	1.50	1.68	1.84	1.98	2.12	2.25	2.37	2.49	2.60	2.70	2.81	2.90	3.00	3.18	3.35
3.5	.048"/1.22mm		1.24	1.52	1.75	1.96	2.14	2.32	2.47	2.63	2.77	2.90	3.03	3.15	3.27	3.39	3.50	3.71	3.91
4	.052"/1.32mm		1.41	1.73	2.00	2.24	2.45	2.65	2.83	3.00	3.16	3.32	3.46	3.61	3.74	3.87	4.00	4.24	4.47
4.5	.055"/1.40mm		1.59	1.95	2.25	2.52	2.76	2.98	3.18	3.38	3.56	3.73	3.90	4.06	4.21	4.36	4.50	4.77	5.03
5	.057"/1.45mm		1.77	2.17	2.50	2.80	3.06	3.31	3.54	3.75	3.95	4.15	4.33	4.51	4.68	4.84	5.00	5.30	5.59
5.5	.060"/1.52mm		1.94	2.38	2.75	3.07	3.37	3.64	3.89	4.13	4.35	4.56	4.76	4.96	5.14	5.33	5.50	5.83	6.15
6	.062"/1.57mm		2.12	2.60	3.00	3.35	3.67	3.97	4.24	4.50	4.74	4.97	5.20	5.41	5.61	5.81	6.00	6.36	6.71
6.5	.064"/1.63mm		2.30	2.81	3.25	3.63	3.98	4.30	4.60	4.88	5.14	5.39	5.63	5.86	6.08	6.29	6.50	6.89	7.27
7	.067"/1.70mm		2.47	3.03	3.50	3.91	4.29	4.63	4.95	5.25	5.53	5.80	6.06	6.31	6.55	6.78	7.00	7.42	7.83
7.5	.070"/1.78mm		2.65	3.25	3.75	4.19	4.59	4.96	5.30	5.63	5.93	6.22	6.50	6.76	7.02	7.26	7.50	7.95	8.39
8	.072"/1.83mm		2.83	3.46	4.00	4.47	4.90	5.29	5.66	6.00	6.32	6.63	6.93	7.21	7.48	7.75	8.00	8.49	8.94
8.5	.074"/1.88mm		3.01	3.68	4.25	4.75	5.21	5.62	6.01	6.38	6.72	7.05	7.36	7.66	7.95	8.23	8.50	9.02	9.50
9	.076"/1.93mm		3.18	3.90	4.50	5.03	5.51	5.95	6.36	6.75	7.12	7.46	7.79	8.11	8.42	8.71	9.00	9.55	10.06
9.5	.078"/1.98mm		3.36	4.11	4.75	5.31	5.82	6.28	6.72	7.13	7.51	7.88	8.23	8.56	8.89	9.20	9.50	10.08	10.62
10	.080"/2.03mm		3.54	4.33	5.00	5.59	6.12	6.61	7.07	7.50	7.91	8.29	8.66	9.01	9.35	9.68	10.00	10.61	11.18
11	.083"/2.11mm		3.89	4.76	5.50	6.15	6.74	7.28	7.78	8.25	8.70	9.12	9.53	9.92	10.29	10.65	11.00	11.67	12.30
12	.087"/2.21mm		4.24	5.20	6.00	6.71	7.35	7.94	8.49	9.00	9.49	9.95	10.39	10.82	11.22	11.62	12.00	12.73	13.42
12.5	.089"/2.26mm		4.42	5.41	6.25	6.99	7.65	8.27	8.84	9.38	9.88	10.36	10.83	11.27	11.69	12.10	12.50	13.26	13.98
13	.091"/2.31mm		4.60	5.63	6.50	7.27	7.96	8.60	9.19	9.75	10.28	10.78	11.26	11.72	12.16	12.59	13.00	13.79	14.53
15	.096"/2.44mm		5.30	6.50	7.50	8.39	9.19	9.92	10.61	11.25	11.86	12.44	12.99	13.52	14.03	14.52	15.00	15.91	16.77
20	.109"/2.77mm		7.07	8.66	10.00	11.18	12.25	13.23	14.14	15.00	15.81	16.58	17.32	18.03	18.71	19.36	20.00	21.21	22.36
25	.125"/3.18mm		8.84	10.83	12.50	13.98	15.31	16.54	17.68	18.75	19.76	20.73	21.65	22.53	23.39	24.21	25.00	26.52	27.95
30	.141"/3.58mm		10.61	12.99	15.00	16.77	18.37	19.84	21.21	22.50	23.72	24.87	25.98	27.04	28.06	29.05	30.00	31.82	33.54
40	.156"/3.96mm		14.14	17.32	20.00	22.36	24.49	26.46	28.28	30.00	31.62	33.17	34.64	36.06	37.42	38.73	40.00	42.43	44.72
50	.172"/4.37mm		17.68	21.65	25.00	27.95	30.62	33.07	35.36	37.50	39.53	41.46	43.30	45.07	46.77	48.41	50.00	53.03	55.90
60	.188"/4.78mm		21.21	25.98	30.00	33.54	36.74	39.69	42.43	45.00	47.43	49.75	51.96	54.08	56.12	58.09	60.00	63.64	67.08

Nozzle Fan Selection

Select the nozzle degree, or spray angle, based on your application. Standard nozzle degrees – 0°, 15°, 25°, and 40°. Using the wrong nozzle degree can damage the surface you are cleaning.

0° – Red:



Cutting nozzle. It delivers a concentrated stream that can gouge or cut. It can cut stubborn stains from concrete and other hard surfaces.

15° – Yellow:

Chiseling nozzle. Working at a 45° angle, this nozzle works like a scraper, stripping paint, grease and grime from hard surfaces.

25° – Green:

Flushing nozzle. The most commonly used nozzle for cleaning dirt from siding, sidewalks and metal furniture as well as for wet sweeping leaves.

40° – White:

Wash nozzle. Its wide spray allows you to wash and rinse a large area fast. It is usually safe with most surfaces, including aluminum siding, windows and vehicles.

Pressure Washer Sales Center

MACHINES • ACCESSORIES • DETERGENTS • PARTS

Position your company to capture the lucrative commercial pressure washer business. The Shark Pressure Washer Sales Center will appeal to professionals looking for the best performing equipment or accessories for their existing equipment.
It is set up to sell!

This attractive, heavy duty display rack goes together quickly using only four bolts and can be set up as an island or against a wall using very little floor space.

- Small footprint
- Easy to set up
- Versatile
- Increase sales

Shown with optional accessories.
Pressure washer machines not included.

Shark's Pressure Washer Sales Center is available in a variety of packages that include our best-selling accessories such as:

- Flat surface cleaners
- High-pressure hoses
- A variety of popular detergents
- Pressure nozzles
- **And much more!**

Surface Cleaner - cleans flat surfaces up to 3 times faster than a wand, and without "striping".
See page 32 for details and pricing on individual surface cleaners.

Parts hooks are easy to install on pegboard, and allow flexibility in display.

Ask your Shark Representative how to create your own pressure washer store-within-a-store. **CALL NOW!**

Shark's Pressure Washer Sales Center comes complete with:

- Rack, signage, display hooks and shelves
- 21" surface cleaner
- Pump oil and general purpose detergent
- Most popular pre-packaged parts including nozzles, guns, wands, hose and couplers

Parts fit most pressure washer brands!

GREAT RETURN ON INVESTMENT!

FREE FREIGHT!*

Shown with optional accessories.
Pressure washer machines not included.
Accessories rack picture may differ from actual product appearance.

9.801-692.0
Pressure Washer Sales Center Kit

PART NUMBER+	ITEM	QTY
SURFACE CLEANERS / ATTACHMENTS		
8.753-572.0	Surface Cleaner 21"	1
GUNS / WANDS		
8.922-197.0	Pressure Wash gun 5000 psi 10 gpm	2
8.922-202.0	36" Lance	2
HOSES		
8.922-209.0	50' 3/8" Bk PW Hose, QC/Nipple	1
NOZZLES		
8.922-243.0	Nozzle Kit 5-pk QC 1/4" #3.0	2
8.922-244.0	Nozzle Kit 5-pk QC 1/4" #3.5	2
8.922-245.0	Nozzle Kit 5-pk QC 1/4" #4.0	2
8.922-246.0	Nozzle Kit 5-pk QC 1/4" #4.5	2
DETERGENTS		
8.901-080.0	Pump Oil	1
9.558-998.0	Karcher pump guard	3
8.698-026.0	SHARK 12x1.5# PWDR GENERAL PURPOSE CLNR	1
MISC		
8.922-267.0	Chemical Injector 3-5 gpm '2A'	1
8.922-271.0	Chem Filter Brass 50X w/ checkvalve	2
8.922-272.0	Fuel filter 1/4" in/out plastic	2
8.922-275.0	Teflon Tape 2-pk, 1/2" x 520"	2
8.922-291.0	Protective goggles	1

PART NUMBER	ITEM	QTY
COUPLERS		
8.922-213.0	Coupler 2-pack 1/4" Female Stainless	1
8.922-214.0	Coupler 2-pack 1/4" Male Stainless	1
8.922-215.0	Coupler 2-pack 3/8" Female Stainless	1
8.922-216.0	Coupler 2-pack 3/8" Male Stainless	1
8.922-217.0	Coupler 2-pack 1/4" Plug Female Zinc	1
8.922-218.0	Nipple 2-pack 1/4" Female Stainless	1
8.922-219.0	Coupler 2-pack 1/4" Plug Male Zinc	1
8.922-220.0	Nipple 2-pack 1/4" Male Stainless	1
8.922-221.0	Nipple 2-pack 3/8" Female Stainless	1
8.922-222.0	Nipple 2-pack 3/8" Male Stainless	1
8.922-227.0	Coupler 2-pk 1/4" Socket Female Brass	1
8.922-228.0	Coupler 2-pk 1/4" Socket Male Brass	1
8.922-229.0	Coupler 2-pk 3/8" Socket Fem Brass	1
8.922-230.0	Coupler 2-pk 3/8" Socket Male Brass	1
8.922-231.0	Coupler 2-pk 3/8" Plug Female Zinc	1
8.922-232.0	Coupler 2-pk 3/8" Plug Male Zinc	1
8.922-233.0	O-ring 10-pk QC EPDM 1/4" to 280 Degr	1
8.922-234.0	O-ring 10-pk EPDM 112/70	1
8.922-235.0	Swivel 1/4" MxF 10.5 gpm 5600 psi SS	1
8.922-236.0	Swivel 3/8" MxF 10.5 gpm 5600 psi SS	1

NOTE: *Kits do not include pressure washer machines.*
+Use part numbers to replenish your parts rack inventory.
**Free freight within lower 48 states only.*

Detergents: Formulated for safe, fast and effective cleaning

Shark Detergents are highly concentrated and made with non-butyl blend of ingredients formulated to provide a non-caustic, low-foaming detergent for a broad range of uses on many surfaces. All detergents are engineered specifically to be metered through a hot- or cold-water pressure washer with a high dilution ratio, making the cost-in-use very economical. Plus, all Shark detergents are biodegradable.

Paint Prep

Shark Paint Prep provides a clean, paint ready surface for professional results. Especially effective on painted wood and vinyl siding that has accumulations of chalky, oxidized paint and soil from air pollution and industrial smoke.

Part Number	Contents	Ship Weight
8.698-022.0	Case of 12 x 1.5-Lb. Jars (Powder Concentrate)	22 lbs

House, Deck & Fence Wash

Ideal product for cleaning and enhancing the appearance of the home and wooden decks and fences. Great to use every spring after harsh winters and the crucial step before the re-staining of decks and fences.

Part Number	Contents	Ship Weight
8.698-021.0	Case of 4 x 1-Gallon Jugs (Liquid)	38 lbs

Vehicle Wash

Designed to quickly and effectively remove dirt, grime, grease and road film from all types of road vehicles. Vehicle Wash is ideal for vehicle wash facilities where it can be used on tractor-trailers, heavy equipment, shop floors, metal or plastic tanks, RVs, trucks, and autos.

**Additional shipping fees may apply, cannot be shipped via air freight.*

Part Number	Contents	Ship Weight
8.698-024.0	Case of 4 x 1-Gallon Jugs (Liquid)	38 lbs

Heavy Duty Equipment and Concrete Cleaner

Formulated to wet, penetrate, and suspend soil, oils and grease for faster, more thorough cleaning effectiveness. Can be used safely on many surfaces, including aluminum, stainless steel, glass, plastic, paint and even fine automotive paint finishes. Ideal for cleaning engines, motors, heavy equipment, farm implements and other objects with high grease content.

**Additional shipping fees may apply, cannot be shipped via air freight.*

Part Number	Contents	Ship Weight
8.698-023.0	Case of 4 x 1-Gallon Jugs (Liquid)	39 lbs

General Purpose Cleaner

General Purpose Cleaner can be used safely on virtually every surface, including aluminum, stainless steel, glass, plastic, paint and fine automotive paint finishes. Ideal for general purpose cleaning around a home or shop, including exterior walls, decks, driveways, and roofs. It is also effective in cleaning machinery, equipment, cars, RVs, and trucks. All-Purpose Cleaner is safe for cleaning indoors or outdoors.

**Additional shipping fees may apply, cannot be shipped via air freight.*

Part Number	Contents	Ship Weight
8.698-025.0	Case of 4 x 1-Gallon Jugs (Liquid)	38 lbs
8.698-026.0	Case of 12 x 1.5-Lb. Jars (Powder Concentrate)	22 lbs

Aluminum Brightener (KD-460)

An extra-strength, acid-based, aluminum brightener designed to tackle the toughest cleaning of truck trailers, aluminum wheels and for preparing aluminum for painting. Do NOT use on glass, polished aluminum or anodized aluminum. It uses ammonium bifluoride, not hydrofluoric acid, and is non-fuming, yet effective in removing grease, oils, baked-on carbon and diesel smoke.

**Additional shipping fees may apply, cannot be shipped via air freight.*

Part Number	Contents	Ship Wt
9.803-746.0	5-Gallon Pail	50 lbs
9.803-747.0	55-Gallon Drum	537 lbs

Polished Aluminum Cleaner (KD-480)

A concentrated, non-etching detergent formulated to quickly penetrate and remove grease, grime, dirt, road film and welding smut from polished aluminum and stainless steel surfaces.

Part Number	Contents	Ship Wt
9.803-748.0	5-Gallon Pail	48 lbs
9.803-749.0	55-Gallon Drum	521 lbs

Acid-Based Coil Cleaner (KD-420)

A powerful, acid-based coil cleaner that effectively attacks rust and hard water deposits in pressure washer hot water coils. It does not contain mineral acids, such as hydrochloric (muriatic), sulfuric and hydrofluoric acids that are commonly used in other coil conditioners and is formulated so it can safely pass through a pressure washer without damaging the high-pressure pump. Do NOT use on aluminum or tin.

Part Number	Contents	Ship Wt
9.803-742.0	Case of 12 x 2-lb (powder concentrate)	28 lbs

Pump Guard

Pump Guard provides freeze protection down to -25°F. Environmentally friendly, it's specifically formulated to prolong the life of your pressure washer by protecting it from corrosion, premature wear and freezing (down to -25° F).

Part Number	Contents	Ship Wt
9.558-998.0	16-ounce	1 lbs

Graffiti Removers

Easy to apply liquid formulas with deep penetrating action designed to remove graffiti from a variety of surfaces.

Part Number	Contents	Ship Wt
8.698-039.0	Brick, Masonry & Concrete Cleaner (case of 4 x 1-Gal jugs)	34 lbs
8.698-040.0	Brick, Masonry & Concrete Cleaner (case of 12 x 1-Qt bottles)	27 lbs
8.698-041.0	Metal Saver (case of 4 x 1-Gal jugs)	34 lbs
8.698-042.0	Metal Saver (case of 12 x 1-Qt bottles)	27 lbs

Airmover 3

- 1/2 hp
- Built-in carpet clip
- Up to 3,000 cfm for fast drying
- 3 speeds of air movement
- 3 standing positions
- ETL certified to UL safety standards

Order No.	Description
1.004-027.0	Airmover 3

Windhandler 3 Blowers

- 1/2 hp
- Built-in carpet clip
- Up to 3,000 cfm for fast drying
- Windhandler includes upright handle and transport wheels
- 3 speeds of air movement

Order No.	Description
1.004-015.0	Windhandler 3

Triad Air Mover

Triad refers to Triple Advantage, which combines high-performance, ergonomics, and space savings.

- Low 1.48 amp draw
- Slim design allows easy transportation
- 3 standable positions
- Optimized CFM, static pressure and air velocity
- 55% more efficient in performance/amp than competitors
- Ductable intake and exhaust

Order No.	Description
1.004-035.0	Triad Air Mover

Triad AFD

The Triad AFD is easily portable and offers the best space maximization. It delivers the highest CFM/Air exchange performance in its class with no increase in power requirements.

- Removes at least 99.97% of airborne particles
- Highest CFM/air exchange performance in its class
- Removes smoke and odors
- Low 1.48 amp draw
- Multifunctional capabilities

Order No.	Description
1.007-902.0	Triad AFD Air Mover

SG2 C Bp Gum Remover

The Kärcher SG2 C Bp is the innovative new solution that vaporizes gum with heat. Safe to use on stone, concrete and even carpet. Great for maintaining shopping malls, schools, train stations, airports and supemarkets.

- Vaporize gum in seconds
- Biodegradable extract dissolves gum without residue
- Ultimate portability
- No cords or water
- Up to 8 hours battery life
- Lighter weight than many back pack systems

Order No.	Description
8.751-300.0	Gum Remover

CHARIOT iSCRUB 20: 20" Stand-On Floor Scrubber

- 50% more productive than conventional walk-behind scrubbers!
- Tight turning radius - 48"
- Aqua-Mizer technology saves on water and solution
- models feature an external fill port for quick access to fill solution tank

Order No.	Description
20" iSCRUB w/ 21A On-Board Battery Charger	
9.840-811.0	3-12V / 130 A/H batteries w/ pad driver
9.840-813.0	3-12V / 114 A/H AGM batteries w/ pad driver
9.840-815.0	3-12V / 130 A/H batteries w/ poly brush
9.840-817.0	3-12V / 114 A/H AGM batteries w/ poly brush
20" iSCRUB DELUXE w/ 21A On-Board Battery Charger	
9.840-901.0	3-12V / 114 A/H AGM batteries w/ pad driver
9.840-905.0	3-12V / 114 A/H AGM batteries w/ poly brush

CHARIOT 2 iSCRUB 22:
22" Cylindrical Stand-On Scrubber

- Cylindrical counter-rotating brushes incorporate sweeping and brushing in one pass
- 10-gallon solution and recovery tanks
- Outside fill port
- Ships with white brushes

Order No.	Description
9.840-938.0	3-12V / 130 A/H batteries, automatic charger
9.840-940.0	3-12V / 114 A/H AGM batteries
9.840-941.0	3-12V / 114 A/H batteries w/ on-board charger

• COMPLETE FULL LINE OF COMMERCIAL & INDUSTRIAL MACHINES AVAILABLE

• MANY OTHER SIZES AND CONFIGURATIONS AVAILABLE - CALL FOR DETAILS

CHARIOT 3 iSCRUB 26: 26" Stand-On Scrubber

- More than 2 times the productivity of walk-behind scrubbers!
- EcoMode and EcoPlus Mode offers quiet cleaning
- Aqua-Mizer technology saves on water and solution
- Easy to transport - fits in an elevator

Order No.	Description
Chariot 3 26" iSCRUB w/ On-Board Battery Charger	
9.841-012.0	205 A/H batteries w/ poly brush
9.841-011.0	225 A/H batteries w/ poly brush
9.841-013.0	234 A/H AGM batteries w/ poly brush
9.841-147.0	205 A/H batteries w/ pad driver
9.841-146.0	225 A/H batteries w/ pad driver
9.841-148.0	234 A/H AGM batteries w/ pad driver
Chariot 3 26" iSCRUB w/ Chemical Metering and On-Board Battery Charger	
9.841-044.0	205 A/H batteries w/ poly brush MC
9.841-043.0	225 A/H batteries w/ poly brush MC
9.841-045.0	234 A/H AGM batteries w/ poly brush MC
9.841-155.0	205 A/H batteries w/ pad driver MC
9.841-154.0	225 A/H batteries w/ pad driver MC
9.841-156.0	234 A/H AGM batteries w/ pad driver MC

CHARIOT 3 iSCRUB 26 SP:
26" Cylindrical Stand-On Scrubber

- More than 2 times the productivity of walk-behind scrubbers!
- EcoMode and EcoPlus Mode offers quiet cleaning
- Aqua-Mizer technology saves on water and solution
- Easy to transport - fits in an elevator

Order No.	Description
Chariot 3 26" SP iSCRUB w/ On-Board Battery Charger	
9.841-018.0	205 A/H batteries
9.841-017.0	225 A/H batteries
9.841-019.0	234 A/H AGM batteries
Chariot 3 26" iSCRUB w/ Chemical Metering and On-Board Battery Charger	
9.841-050.0	205 A/H batteries MC
9.841-049.0	225 A/H batteries MC
9.841-051.0	234 A/H AGM batteries MC

CHARIOT 2 iGLOSS 20: Small Platform Burnisher

- 20-inch, 2000 rpm burnisher
- Offers smaller Chariot platform maneuverability and productivity
- Patent-pending spring-loaded weighted pad
- Available in passive or active dust control

Order No.	Description
Chariot 2 20" iGLOSS w/ PASSIVE Dust Control	
9.841-074.0	3-12V / 130 A/H batts, automatic charger
9.841-075.0	3-12V / 114 A/H AGM batts, automatic charger
9.841-076.0	3-12V / 114 A/H AGM batts, on-board charger
9.841-080.0	3-12V / 225 A/H batts, automatic charger
9.841-081.0	3-12V / 234 A/H AGM batts, automatic charger
9.841-082.0	3-12V / 234 A/H AGM batts, on-board charger
Chariot 2 20" iGLOSS w/ ACTIVE Dust Control	
9.841-086.0	3-12V / 225 A/H batts, automatic charger
9.841-087.0	3-12V / 234 A/H AGM batts, automatic charger
9.841-088.0	3-12V / 234 A/H AGM batts, on-board charger

CHARIOT iGLOSS: Large Platform Burnisher

- 20-inch, 2600 rpm burnisher
- Flexible pad driver
- Toggle switch to lower burnisher deck
- Dust control system
- On-board storage compartment

Order No.	Description
20" iGLOSS	
9.840-046.0	3-12V / 205 A/H batts, 36V/21A C175 automatic charger
9.840-047.0	3-12V / 225 A/H batts, 36V/21A C175 automatic charger
9.840-045.0	3-12V / 234 A/H AGM batts, 36V/21A dual mode automatic charger
20" iGLOSS w/ PRODUCTIVITY PLUS VALUE PACK (comes w/ 2 battery packs)	
9.840-050.0	2 x 3 pack-12V / 205 A/H batts, 36V/21A C175 automatic charger
9.840-051.0	2 x 3 pack-12V / 225 A/H batts, 36V/21A C175 automatic charger
9.840-049.0	2 x 3 pack-12V / 234 A/H AGM batts, 36V/21A dual mode automatic charger

CHARIOT iVAC: 24" or 34" Stand-On HEPA Vacuum

- Vacuums carpet, tile, wood, concrete, stone, rubber, VCT
- 8" standard side broom
- HEPA filtration standard
- On-board tool storage
- 68 dBA - quiet operation
- Comes standard with a 10' hose and 2-piece hand tool set for off-aisle cleaning

Order No.	Description
24" iVAC	
9.840-913.0	3-12V / 140 A/H batteries
9.840-914.0	3-12V / 114 A/H AGM batteries
9.840-916.0	3-12V / 114 A/H AGM batteries w/ on-board charger
34" iVAC	
9.840-932.0	3-12V / 205 A/H batteries
9.840-933.0	3-12V / 225 A/H batteries
9.840-931.0	3-12V / 234 A/H AGM batteries

CHARIOT 3 iEXTRACT 26

- 25-gallon capacity
- Productive deep restorative extraction
- Two speed settings
- 100 PSI high-pressure pump
- Two 800 rpm dual counter-rotating cylindrical brushes
- Weighted dual vacuum shoes w/ dual motors

Order No.	Description
26" iEXTRACT w/ Self Charger	
9.841-214.0	Chariot 3 iExtract 26 DUO, 205 A/H
9.841-215.0	Chariot 3 iExtract 26 DUO, 225 A/H
9.841-216.0	Chariot 3 iExtract 26 DUO, 234 A/H AGM
26" iEXTRACT w/ On-Board Charger	
9.841-217.0	Chariot 3 iExtract 26 DUO, 205 A/H
9.841-218.0	Chariot 3 iExtract 26 DUO, 225 A/H
9.841-219.0	Chariot 3 iExtract 26 DUO, 234 A/H AGM

Presto 3

- 1.16 hp, two-stage vac motor
- 55 psi pump
- 2 gallon (7.6 ltr.) solution and recovery tanks
- Clear 4" (102 mm) wide hand tool
- The Presto 3 Deluxe includes both clear hand tool and Double Dry hand tool

Order No.	Description
9.840-068.0	Presto 3 extractor w/ standard hand tool
9.840-069.0	Presto 3 Deluxe extractor w/ standard and Double Dry hand tool

Priza:

Mini Extractor with Spray Wand

- Adjustable upright spray wand
- Hand wand
- 2.6 gal. solution tank
- 2.4 gal. recovery tank
- 0.26 gallon (0.1 ltr.)/min spray rate
- 11.4 cfm (54 ltr./s)
- Removable recovery tank
- 88 inch waterlift

Order No.	Description
1.100-122.0	Priza extractor w/ 8.2' hose, wand & hand tool

Mini Pro:

Most Popular Small Area Extractor

- 10.5" (267 mm) cleaning path
- 12.5" (314 mm) cast aluminum vac shoe
- 25' power cable
- 1.5 hp, three-stage vac motor
- Brush assist
- Floating brush deck
- Adapts for accessory cleaning tools
- ETL approved

Order No.	Description
1.008-039.0	Mini Pro 4-gal extractor
8.629-036.0	Hose & hand tool kit with bag

Cadet 7

- 15" (380 mm) cleaning path
- 17" (430 mm) floating vac shoe
- 50' power cable
- 1/3 hp, three-stage vac motor
- 73 psi solution pump
- Adapts for accessory cleaning tools
- 8-position brush height adjustment
- Brush assist
- Spring-loaded floating vac shoe
- UL Listed to U.S. and Canadian safety standards

Order No.	Description
1.008-022.0	Cadet 7 (7-gal) extractor

Clipper Duo

- 16" (508 mm) cleaning path
- 10-gallon capacity
- Dual counter-rotating brushes
- On-board cleaning tool w/ 8 ft hose
- Floating brush deck
- Brush assist drive system
- 18" floating vac shoe
- UL Listed to U.S. and Canadian safety standards

Order No.	Description
1.008-048.0	Clipper Duo

Zephyr Steam Cleaner:

For Commercial Steam Cleaning Applications

- Heats quickly, allowing for constant refilling without the unit cooling down
- 1/2-gal capacity
- 2-tank system (boiler & refill tank)
- Dual Boiler tank heating elements (1500W & 750W)
- 209°F average water temp

Comes with steam gun, extension tube, floor nozzle, carpet adapter, cloth set, hand nozzle, circular brush, spot nozzle & fill funnel

Order No.	Description
1.092-803.0	Zephyr Professional Steam Cleaner
9.840-860.0	Zephyr Professional Steam Cleaner w/ Cart

The Sensor is the only vacuum to offer superior upright vacuuming technology that protects itself from operator neglect. The Sensor gives you the assurance of a two year warranty on the brush and vacuum motor, and a lifetime warranty on belts.

Sensor S:
Upright Vacuum

- Powerful Sensor S models feature 1,200 watt vacuum motor
- Manual brush height adjustment
- Electronic control system warns operator if bag is full or brush is jammed
- Motor turns off to prevent damage if warnings are ignored
- 3-stage 0.3 micron filtration efficiency over 99%
- Optional HEPA filter
- Available in 12" and 15"
- Ultra-light handle weight
- UL Listed to U.S. and Canadian safety standards

Current #	Description
1.012-021.0	Sensor S 12" (300 mm) Upright Vacuum
1.012-022.0	Sensor S 15" (380 mm) Upright Vacuum

Sensor XP:
Upright Vacuum

- Powerful Sensor XP models feature 1,200 watt vacuum motor
- Automatic Vacuuming System automatically adjusts brush height for peak efficiency on any surface
- Electronic control system warns operator if bag is full or brush is jammed
- Motor turns off to prevent damage if warnings are ignored
- 3-stage 0.3 micron filtration efficiency over 99%
- Optional HEPA filter
- Ultra-light handle weight
- Available in 12", 15" and 18"
- UL Listed to U.S. and Canadian safety standards

Current #	Description
1.012-024.0	Sensor XP 12" (300 mm) Upright Vacuum
1.012-027.0	Sensor XP 15" (380 mm) Upright Vacuum
1.012-030.0	Sensor XP 18" (460 mm) Upright Vacuum

Vac Pac:
Portable Back Vacuums includes hose & tool kit

- 6 and 10 quart capacities to accommodate different operators and job requirements
- Ergonomically designed harness system for operator comfort
- 5-piece tool kit included
- Vacuum hose is designed for right or left handed operation
- Cord mounted power switch for operator ease of use
- Optional high-efficiency filter kit filters 99.9% of particles down to 0.3 microns
- UL Listed to U.S. and Canadian safety standards

Order No.	Description
1.014-007.0	Vac Pac Back Vacuum, 6 qt
1.014-005.0	Vac Pac Back Vacuum, 10 qt

Recover Wet/Dry Vacs:
Versatile wet/dry vacs

- 1.8 hp motor
- Water lift of 80"
- On-board cleaning tools and storage
- Designed for easy mobility
- ETL approved to U.S. and Canadian safety standards

Order No.	Description
1.428-513.0	Recover 7, 7-gal w/ hose & tool kit
1.428-609.0	Recover 12, 12-gal w/ hose & tool kit
9.840-844.0	Recover 12, 12-gal w/ front mounted squeegee, hose & tool kit

Titan Wet/Dry Vacs: Powerful and durable for commercial and industrial use

- Front mounted squeegee for any application
- Made with strong blow-molded plastic
- 1.5 hp, two-stage motor produces 101 cfm and 87" of waterlift
- Features polyester bag-style filter with optional high efficiency cartridge filter
- Includes 8 ft. hose and 8-piece tool kit with carpet and floor tool, squeegee tool, upholstery tool and crevice tool
- UL Listed to U.S. and Canadian safety standards

Order No.	Description
1.013-010.0	Titan 720, 20-gal w/ hose & tool kit hose & tool kit
8.616-404.0	Titan squeegee kit for 720

Recover 18 Wet/Dry Vac:
Large capacity for medium to large jobs

- Front-mounted squeegee offers more productive water pick-up
- Unique tank design that results in 100% dumping of solution with no tipping required
- Designed with an easy-access squeegee lift lever
- Easy to use, train, operate
- New design blades self-adjust with factory set automatic adjustment
- Complete with on-board tool storage compartment with safety sign storage

Order No.	Description
1.013-019.0	Recover 18, 18-gal w/ hose & wand only
1.103-492.0	Recover 18, 18-gal w/ squeegee only
1.013-017.0	Recover 18, 18-gal w/ squeegee, hose & wand

Dust Extraction Vacs Nt Series:
With self-cleaning filter system

- Features TACT (Trigger Air Draft Cleaning Technology) filter system, allowing continuous cleaning without the need to shut the unit down for filter cleaning
- Switch from wet to dry work without swapping filters
- Electronic tank level monitor shuts motor off when full capacity is reached

Order No.	Description
1.184-854.0	NT 35/1 Eco, 9.2-gal w/ TACT self cleaning filter system
1.145-834.0	NT 45/1 Tact, 12-gal w/ TACT self cleaning filter system
1.325-104.0	NT 65/2 Eco, 17-gal w/ PFC self cleaning filter system

Windsor Rental Expert Starter Packages

FREE FREIGHT!* w/ purchase of either package

Starter Package A

- Chemical Rack & Signage
- (2) Mini Pro 4-gal. Extractor
- (1) Deluxe Hand Tool Kit (accy to Mini Pro)
- (1) Airmover
- All-In-One Cleaner (4 x 1-gallon)
- All-In-One Cleaner (12 x 1 qt)
- Carpet Cleaner (4 x 1-gallon)
- Carpet Cleaner (12 x 1 qt)

Order No.	Description
N/A	Expert Starter Package A

Starter Package B

- Chemical Rack & Signage
- (2) Mini Pro 4-gal. Extractor
- (1) Deluxe Hand Tool Kit (accy to Mini Pro)
- (1) Presto 3 Mini Extractor/Spotter
- All-In-One Cleaner (4 x 1-gallon)
- All-In-One Cleaner (12 x 1 qt)
- Carpet Cleaner (4 x 1-gallon)
- Carpet Cleaner (12 x 1 qt)

Order No.	Description
N/A	Expert Starter Package B

Free freight within lower 48 states only.

EXPERT CLEANING CHEMICALS:

- All-In-One Carpet Cleaner
- Carpet Cleaner Concentrate

Order No.	Description
8.695-229.0	Expert All-In-1 Carpet Cleaner (W510), 12 x 1-qt
8.695-230.0	Expert All-In-1 Carpet Cleaner (W510), 4 x 1-gal
8.695-233.0	Expert Carpet Cleaner Concentrated (W520), 12 x 1-qt
8.695-234.0	Expert Carpet Cleaner Concentrated (W520), 4 x 1-gal

Saber Blade 16: Cylindrical Micro Scrubber

- Compact design provides powerful scrubbing in congested areas
- Two counter-rotating brushes with variable cleaning pressure up to 88 lbs
- Two squeegees for pick up in forward and reverse
- 2.5 gallon tanks
- No tool brush removal
- Ergonomic flip handle that folds down for easy storage
- Easy to understand controls

Order No.	Description
1.783-308.0	Saber Blade 16", cylindrical brush, cord electric

Saber Compact 20: Automatic Floor Scrubber
Available in brush/pad assist drive or traction drive

- 20" scrub path
- Rugged construction
- Ergonomic handle and simple controls
- Easy to maintain and service

Traction model includes:
- Transaxle traction drive
- Adjustable pad pressure (from 55 lbs. up to 105 lbs.)
- Solenoid controlled solution valve
- Option of standard or deluxe squeegee
- 45" (1143 mm) turn radius

Order No.	Description
24V System, Pad Assist, Standard Squeegee, On-Board Battery Charger	
9.840-140.0	2-12V/105 A/H batt, 24V/12A auto charger w/ pad driver
9.840-141.0	2-12V/130 A/H batt, 24V/12A auto charger w/ pad driver
24V System, Traction Drive, Standard Squeegee, On-Board Battery Charger	
9.840-149.0	2-12V/105 A/H batt, 24V/12A auto charger w/ pad driver
9.840-150.0	2-12V/130 A/H batt, 24V/12A auto charger w/ pad driver
24V System, Traction Drive, Deluxe Squeegee, On-Board Battery Charger	
9.840-311.0	2-12V/105 A/H batt, 24V/12A auto charger w/ pad driver
9.840-314.0	2-12V/130 A/H batt, 24V/12A auto charger w/ pad driver

Radius Manual Sweeper

- Dual wheel drive provides continuous main roller sweeping during turns
- 28" cleaning path
- Direct throw sweeping
- 11 gallon (42 ltr.) capacity
- Right side broom

Order No.	Description
1.517-104.0	Radius Manual, 28" (includes brushes)

Saber Cutter 26: Aqua-Mizer technology increases solution usage efficiency

- 26" and 32" scrub path models
- Outstanding operator visibility
- Fast and simple access to major components, motors, batteries, brushes
- Choice of mechanical lift to raise/lower scrub deck OR an electrical actuator

Order No.	Description
26" - 24V System, Mechanical Scrub Deck, On-Board Battery Charger	
9.840-161.0	4-6V/250 A/H batt, 24V/25A auto charger w/ pad driver
9.840-162.0	4-6V/305 A/H batt, 24V/25A auto charger w/ pad driver
26" - 24V System, Actuated Scrub Deck, On-Board Battery Charger	
9.840-207.0	4-6V/250 A/H batt, 24V/25A auto charger w/ pad driver
9.840-208.0	4-6V/305 A/H batt, 24V/25A auto charger w/ pad driver
32" - 36V System, Mechanical Scrub Deck, On-Board Battery Charger	
9.840-173.0	6-6V/250 A/H batt, 36V/21A auto charger w/ pad driver
9.840-171.0	6-6V/312 A/H AGM batt, 36V/25A auto charger w/ pad driver
32" - 36V System, Actuated Scrub Deck, On-Board Battery Charger	
9.840-218.0	4-6V/250 A/H batt, 36V/21A auto charger w/ pad driver
9.840-219.0	4-6V/305 A/H batt, 36V/21A auto charger w/ pad driver

NEW! TAZ with Orb technology

All surface cleaning, scrubbing, sanding, polishing, extraction, interim, and grinding machine

The **Taz** is the only all-surface cleaning, scrubbing, sanding, polishing, extraction, interim, and grinding machine in the industry! **It conquers carpet, stone, tile & grout, wood, vinyl, concrete, epoxy, and other surfaces.** The Taz excels at chemical-free stripping, interim carpet encapsulation, tile & grout cleaning and more!

- 1725 rpm
- 17"-21" cleaning path
- Quick change drop-in cylinder holder
- Variable pad pressure with adjustable wheels
- Tilt-back design
- Electric
- Quiet
- Easy operation

Production Rate:

- **Wood:** up to 4,000 ft2/hr
- **Stone:** up to 120 ft2/hr
- **Tile & Grout**: varies on condition

Ergonomic hand grips: to rest hands, prevent fatigue and increase productivity
Spray switch: manual control of water amount
On-off switch: does not need to be held
Removeable 3-gallon cleaning solutions: can be switched quickly, saving time
Adjustable frame: for individual height adjustments
Motor: 1400W, 120-240V/ 50-60Hz, 6-11A, 1725 rpm
Adjustable spray jets: for improved productivity and even solution coverage
10-inch wheels: chemical resistant and non-marking
Handle: to lift and lower base
Base: is free-floating
Bumper: protects walls and obstacles

TAZ cleans and treats a variety of surfaces

Weight set: for sanding and grinding

Weights installed on base: Weights are included with machine

Order No.	Description	
9.841-232.0	TAZ machine (w/o solution tank)	
9.841-231.0	TAZ DELUXE machine (w/ solution tank)	
8.637-471.0	Weight Kit	*(Weight kit included at no charge)*

FOR TILE, CONCRETE & GROUT - Order these Accessories	
8.637-468.0	Scrub Brush

FOR CHEMICAL-FREE STRIPPING - Order these Accessories	
8.637-467.0	Chemical-Free Stripping Pad (5 pk)

Stone Care and Wood Care Accessories Coming Soon!

Lightning 1500: High-Speed Burnisher

- 1500 rpm
- 20" cleaning path (710 mm)
- Great balance, easy to handle
- 1.75 hp DC motor for fast shine
- Low profile design
- Dual-lever switches, adjustable handle
- Flexible pad driver

Order No.	Description
1.009-016.0	Lightning 1500 Burnisher

Lightning Propane: Fast, Consistent Burnishing

- 2000 rpm
- 24" and 27" cleaning path models
- 17 hp propane engine
- Automotive-grade catalytic mufflers
- EPA certified low emmission fuel system
- Quick change drop-in cylinder holder
- Variable pad pressure w/ adjustable wheels
- Tilt-back design

Order No.	Description
1.022-322.0	Lightning 24" Propane Burnisher
1.022-323.0	Lightning 27" Propane Burnisher

Lightning 2000: Ultra High-Speed Burnisher

- 2000 rpm
- 20" cleaning path (710 mm)
- 1.5 hp direct-drive motor
- Low profile design
- Dual-lever switches, floating handle
- Flexible pad driver
- Dust control eliminates follow-up mopping
- Durable all metal design

Order No.	Description
1.009-019.0	Lightning 2000 Burnisher

Bolt Series: Easy-To-Use Floor Machines

- 66 frame, AC motor for longer machine life on BP 13, BP 17, and BP 20X
- Dual capacitors for easy start-up and smoother operation
- Rugged cast aluminum base with full protective bumper
- All-steel Triple Planetary gear transmission for longer life
- Sure grip handle height adjustment
- Durable cast aluminum switch housing
- Safety switch prevents accidental start-up
- UL Listed to U.S. and Canadian safety standards

Order No.	Description
1.009-084.0	Bolt 13", 175 rpm, 1.0 hp, w/ pad driver
1.009-082.0	Bolt 17", 175 rpm, 1.5 hp, w/ pad driver
1.009-087.0	Bolt 20", 175 rpm, 1.5 hp, w/ pad driver
1.009-089.0	Bolt Dual Speed 20", 175/300 rpm w/ high speed pad driver

Applications for Floor Machines and Burnishers:

- Grocery Stores
- Shopping Malls
- Municipalities
- Schools
- Hospitals
- Hotels

KM 85/50 W Bp Adv: 34" Walk-Behind Sweeper
Compact, maneuverable, and ruggedly built

- Capable of sweeping up to 100,000 sq. ft. of floor per battery charge
- Ideal for facilities with a mixture of congested areas and open spaces
- Overthrow sweeping technology - fills container to nearly 100% capacity
- Durable industrial design

Order No.	Description
9.840-758.0	24V Walk Behind Sweeper. Includes (2) 105 a/h batteries & charger, main broom & side broom
9.840-760.0	24V Walk Behind Sweeper. Includes (2) 100 a/h AGM batteries & charger, main broom & side broom

KM 100/100 R Bp: 40" Electric Ride-On Sweeper
For large outdoor or indoor areas

- Ease-of-use features: adjustable seat, large wheels, and power steering
- Two sweeper containers
- Large 99.5% efficient cylindrical filter is automatically cleaned after every use
- Self-adjusting floating main broom
- Variable speed forward and reverse

Order No.	Description
9.840-761.0	24V Ride-On Sweeper w/ 260 a/h batteries, battery tray, charger, cable adapter, main & side brooms
9.840-762.0	24V Ride-On Sweeper w/ 312 a/h AGM batteries, charger, battery tray, cable adapter, main & side brooms

KM 120/150 R BP: 48" Hydraulic Dump Ride-On Sweeper

- Capable of sweeping over 93,000 sq. ft. per hour
- 39.6-gal capacity hopper
- Overthrow sweeping technology - fills container to nearly 100% capacity
- 24v battery operated system with no petrol fumes.

Order No.	Description
9.840-891.0	BP Ride-On Sweeper w/ main broom, side broom, battery tray, & cable adapter. Does not include charger cables or battery.
9.840-763.0	BP Ride-On Sweeper w/ 360 a/h batteries, main and side broom, battery tray, & cable adapter.
9.840-764.0	BP Ride-On Sweeper w/ 312 a/h AGM batteries, main and side broom, battery tray, & cable adapter.
9.841-128.0	BP Model (2 side brushes) Ride-On Sweeper
9.841-129.0	BP Model (2 side brushes) Ride-On Sweeper w/ 312 a/h AGM batteries, main and side broom, battery tray, & cable adapter.
9.841-127.0	LPG Model (2 side brushes) Ride-On Sweeper
9.840-859.0	LPG Model Ride-On Sweeper

Applications for Industrial Sweepers:

- Warehouses
- Stadiums
- Municipalities
- Schools
- Convention Centers

BD 80/120W: 32-Gallon, 32" Walk-Behind Scrubber

Our largest, most powerful walk-behind scrubber/drier

- Aqua-Mizer technology uses less water and detergent
- Variable down pressure
- 23-gal solution / 25-gal recovery tanks
- Continuous heavy-duty cleaning up to 3-hours
- Available in cylindrical brush models or pad driver models

Order No.	Description
Cylindrical Brush Models	
9.840-732.0	BD 80/120 w/ 2 midgrit brushes & squeegee. Does NOT include batteries, cables or battery charger.
9.840-733.0	BD 80/120 w/ 2 midgrit brushes, squeegee, 260 a/h batteries, cables & battery charger
9.840-734.0	BD 80/120 w/ 2 midgrit brushes, squeegee, 330 a/h batteries, cables & battery charger
9.840-735.0	BD 80/120 w/ 2 midgrit brushes, squeegee, 335 a/h batteries, cables & battery charger
9.840-736.0	BD 80/120 w/ 2 midgrit brushes, squeegee, 312 a/h AGM batteries, cables & battery charger

Order No.	Description
Pad Driver Models	
9.840-822.0	BD 80/120 w/ 2 pad holders & squeegee. Does NOT include batteries, cables or battery charger.
9.840-823.0	BD 80/120 w/ 2 pad holders, squeegee, 260 a/h batteries, battery tray, cables & battery charger
9.840-824.0	BD 80/120 w/ 2 pad holders, squeegee, 330 a/h batteries, battery tray, cables & battery charger
9.840-825.0	BD 80/120 w/ 2 pad holders, squeegee, 335 a/h batteries, battery tray, cables & battery charger
9.840-826.0	BD 80/120 w/ 2 pad holders, squeegee, 312 a/h AGM batteries, battery tray, cables & battery charger

Applications for Industrial Scrubbers:

- Businesses
- Municipalities
- Warehouses
- Schools
- Construction

Compact CoAg: Cost-effective wash water treatment system

The Compact CoAg is a cost-efficient water recycling system for equipment companies that wash oily, muddy equipment on-site. By law, certain types of wash water cannot drain into the sewer system. The Compact CoAg cleans wash water to then be used again or flushed down the sewer drain.

Compact CoAg Skid Mounted Water Recycling System

****** Other options & configurations available ******
Call for details & pricing

Features

- Easy to use and operate
- Easy to install - comes pre-plumbed on a skid, just plug & play!
- Small footprint
- Cost-efficient
- Multiple injection ports for customizing the application
- Powder coated steel support frame
- ETL certified to UL and CSA safety standards
- No stagnant water = NO ODORS!

Many more waste water treatment systems available.

We can address any of your waste water needs. Call to find the right system for you.

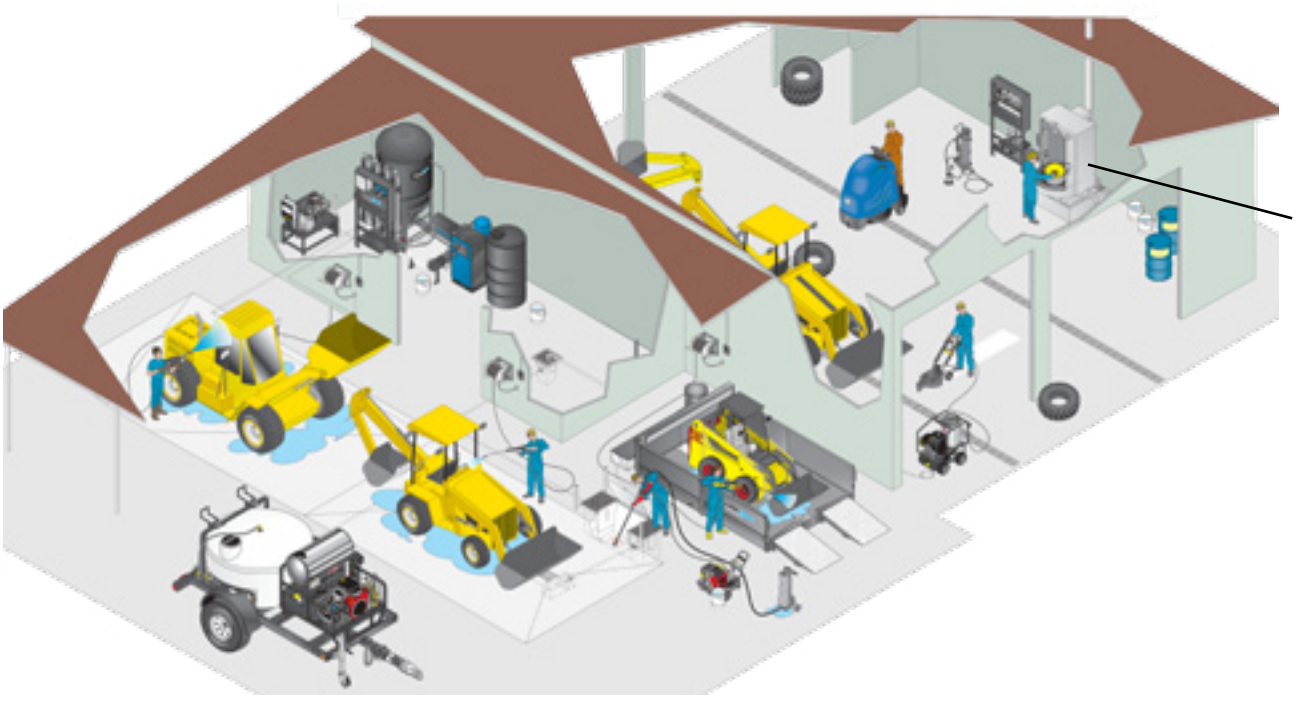

Wash Pads: Cost-effective chemical water treatment system

Our above ground containment rack systems makes shipping and installing a wash rack easier than ever. With no permitting required, this bolt together system can be installed in a matter of hours.

The low profile modular design with a maximum deck height of 6 inches (15.24 cm) can be purchased in various sizes and configurations to meet your current site requirements. The modular design also allows for shipping under LTL freight rates, or inside of an ocean cargo container for export purposes.

Features:

- Multiple ramp options available, including Drive-On / Back Off or Drive-Through
- Available in 9' wide and 18' wide models
- Diamond plate deck surface
- Deck height 6"

DRIVE-ON / BACK-OFF CONFIGURATION (18 FEET WIDE MODEL)

SHOWN W/ OPTIONAL CANOPY

DRIVE-THROUGH CONFIGURATION (18 FEET WIDE MODEL)

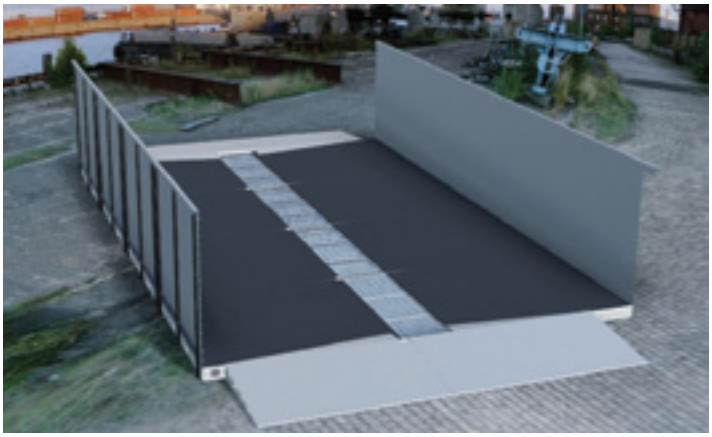

CONVEYOR OPTION
(FOR 18 FT. WIDE OR GREATER CONTAINMENT RACKS)

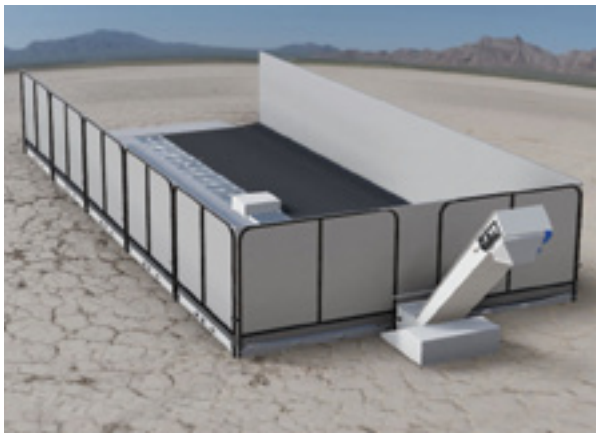

****** Many models and options available ******
Call for details

SHARK
Cleaning Equipment

TEL 800.771.1881

FAX 877.526.3246

www.SharkPW.com

sales@sharkpw.com

EFFECTIVE JANUARY 1, 2015

 © 2015